NORTEK

Lighting Lives...

CATALOGUE 2026-27

SUCCESS STORY

Nortek, since its inception in 2014, has emerged as a leading name in the lighting industry, guided by a principle of offering customers the best quality and outstanding service. We have expanded our product range to include over 60 exclusive products, becoming one of India's most trusted and popular light brands. In 2023, we took a significant step forward by introducing a new line of products, including Wires & Cables and PVC Insulated Tapes, further diversifying our offerings. This move was met with great success, strengthening our position in the market and expanding our customer base.

Throughout this journey, Nortek's success story has been woven with determination, passion, and a steadfast commitment to illuminating lives across India. From humble beginnings with just two products, today we celebrate a nationwide presence. With over

60 distributors and
7000+ dedicated dealers

forming a robust network, we continue to shine as a beacon of quality and customer satisfaction in the lighting industry.

VISION &

Nortek's commitment to excellence extends beyond our products; it is ingrained in our customer-centric approach. We understand that each space is unique, and our comprehensive range of lighting solutions caters to diverse requirements, ensuring every customer finds their perfect fit. As a responsible brand, we prioritise sustainability and environmental consciousness, which is reflected in our diverse range of energy-efficient lighting solutions. Our constant endeavor to harness India's natural resources through solar lighting further solidifies our dedication to a greener and brighter future.

With an unwavering vision and a dedicated team, Nortek stands tall as a beacon of innovation, creativity, and reliability in the world of lighting. We continue to evolve, learn and adapt staying true to our mission of illuminating lives and spaces with brilliance, one exceptional lighting experience at a time.

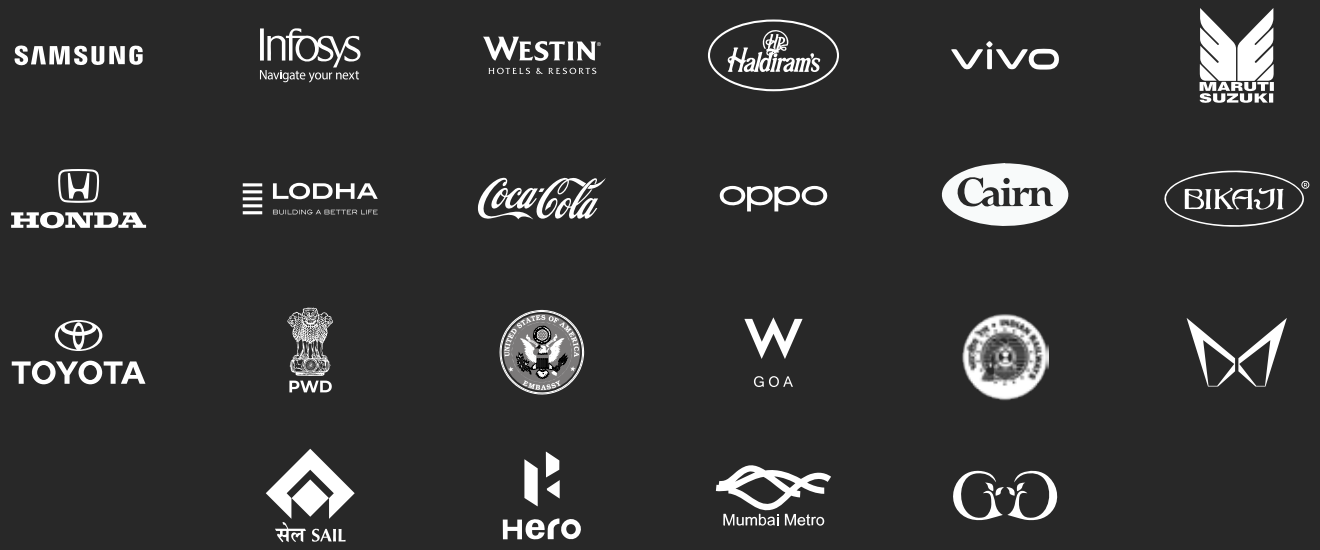

AFFILIATIONS

As a testimony to our commitment to excellence, Nortek proudly holds affiliations with prestigious industry organizations and esteemed partners. These associations reflect our dedication to uphold the highest standards of quality and staying at the forefront of innovation in the lighting sector. We continuously collaborate with like-minded entities to amplify our impact and drive positive change in the lighting industry.















CERTIFICATIONS

At Nortek, we prioritise the safety and satisfaction of our customers. To ensure our products meet the most stringent quality standards, we hold various certifications that underscore our commitment to manufacturing top-notch fixtures such as: (e.g. : BIS, CE, ISO, ROHS, BEE Star, etc). Our certified products provide not just efficient illumination, but also peace of mind, knowing that each fixture has been thoroughly tested and approved for outstanding performance.

CONT

09 COB DOWNLIGHT

39 COB SURFACE

49 TRACK LIGHT

55 MAGNETIC LIGHT

61 DOWNLIGHT

80 LINEAR LIGHT

CONTENTS

87 ROPE LIGHT

95 STRIP LIGHT

101 LED DRIVER

106 SURFACE PANEL LIGHT

112 PANEL LIGHT

CONTENTS

121 BULB & INVETER

125 LED FAN LIGHT

127 MIRROR LIGHT

129 LED BATTEN LIGHT

135 OUTDOOR LIGHT

143 SOLAR LIGHT

CONTENTS

148 BOLLARD LIGHT

155 WALL LIGHT

164 LED FOOT LIGHT

167 GARDEN LIGHT

171 HI-BAY LIGHT

174 WIRES & CABLES

01.

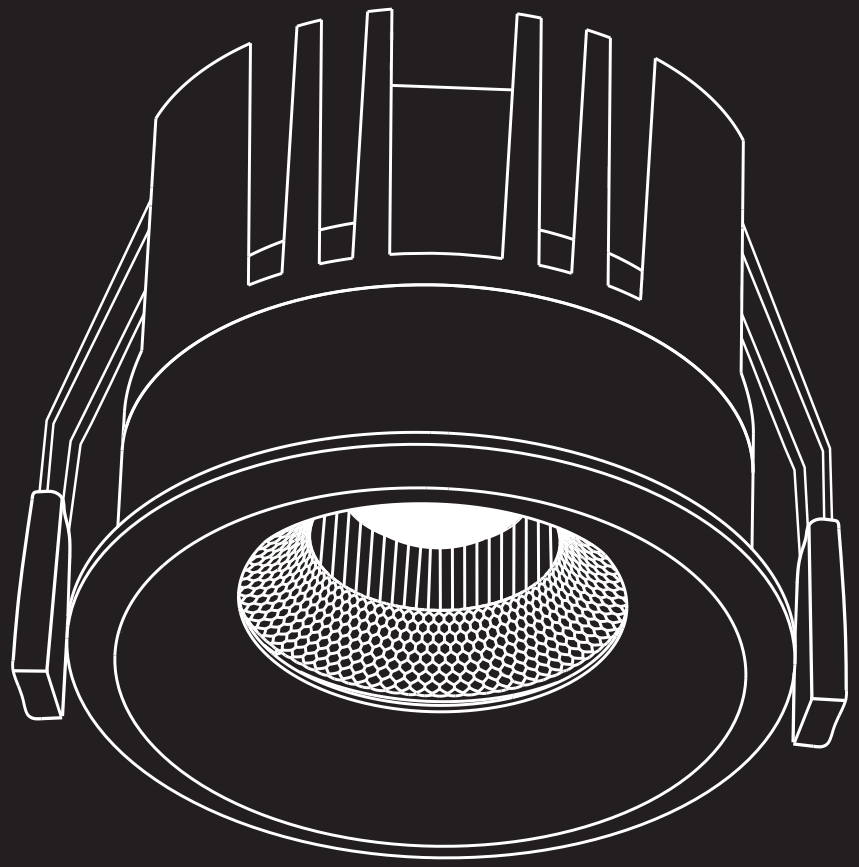

COB DOWNLIGHT



Light Colours :

4CCT Switch : WW NW CW & 3 in 1

2.4G (Dimmable & Tuneable)

Shapes : Round

Wattages
12W | 20W

Dimensions (mm)
63, 83

Cutouts (mm)
55, 75

Heights (mm)
80, 82

SIYAA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Matt White & Matt Black

Beam Angle 36 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Bridgelux	Dimmable & Tuneable 2.4G Remote & App Control





CLARA

Twin COB Downlight



Construction Material : Aluminium Die Cast
Body Colour : Matt Black & Matt White

Light Colours :

4CCT Switch : WW NW CW & 3 in 1

2.4G (Dimmable & Tuneable)

Shapes : Rounded Rectangle

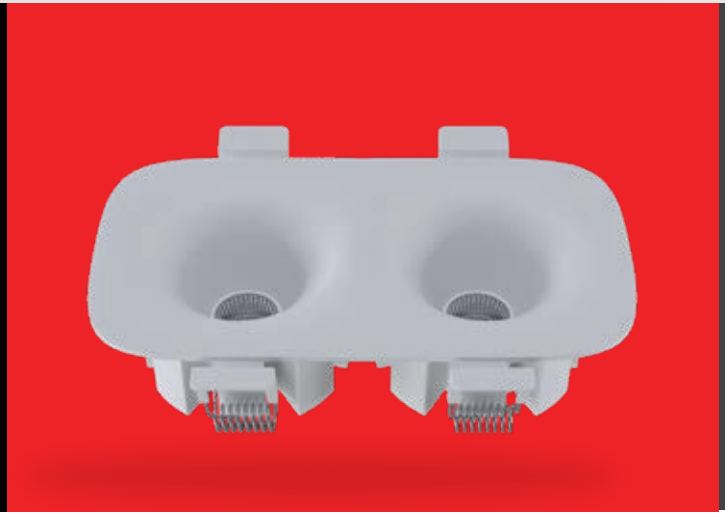

Beam Angle 36 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Bridgelux	**Dimmable & Tuneable** 2.4G Remote & App Control

Wattages
18W | 30W

Dimensions (mm)
122 X 65, 162 X 85

Cutouts (mm)
113 X 55, 153 X 75

Heights (mm)
46, 50



SASHA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Matt White & Matt Black

Light Colours :

3CCT Switch : WW NW CW

2.4G (Dimmable & Tuneable)

Shapes : Round

Wattages
9W | 15W

Dimensions (mm)
60, 70

Cutouts (mm)
55, 65

Heights (mm)
76, 86



Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control

LIANA

COB Downlight



Construction Material : Aluminium Die Cast
Body Colour : White, Black & Gun Metal

Light Colours :

4CCT Switch : WW NW CW & 3 in 1

2.4G (Dimmable & Tuneable)

Shapes : **Round**

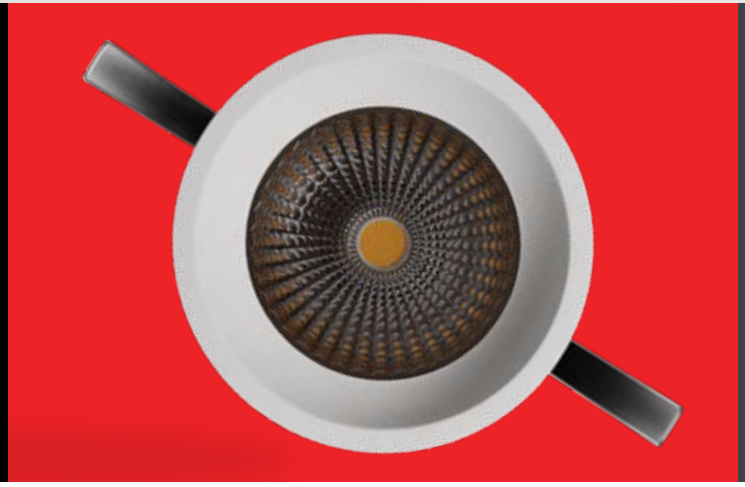

Beam Angle 36 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Bridgelux	**Dimmable & Tuneable** 2.4G Remote & App Control

Wattages
12W | 18W

Dimensions (mm)
45, 55

Cutouts (mm)
38, 48

Heights (mm)
98, 98







VATICA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Matt White & Matt Black

Light Colours :

3CCT Switch : WW NW CW

2.4G (Dimmable & Tuneable)

Shapes : **Round**

Wattages
12W | 18W

Dimensions (mm)
61, 74

Cutouts (mm)
55, 75

Height (mm)
104, 105

Beam Angle 36 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Bridgelux	Dimmable & Tuneable 2.4G Remote & App Control

VATICA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Matt Black & Matt White



Plus Pro

Light Colours :

3CCT Switch : WW NW CW

2.4G (Dimmable & Tuneable)

Shapes : **Round**



Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

Led Chip
Bridgelux

IP Rating
IP20

Dimmable & Tuneable
2.4G Remote & app control

Tiltable
Yes (Pro)

Wattages
12W | 18W

Dimensions (mm)
61, 74

Cutouts (mm)
55, 75

Heights (mm)
104, 105



PERNIA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Black, White & Gun Metal

Wattages
9W | 15W | 20W

Dimensions (mm)
65, 75, 90

Cutouts (mm)
60, 70, 85

Heights (mm)
46, 55, 57

Light Colours :

3 CCT Switch : WW NW CW

2.4G (Dimmable & Tuneable)

Shapes : **Round**





Beam Angle 36 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Bridgelux	Dimmable & Tuneable 2.4G Remote & App Control



TIARA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Matt Black & Matt White



Light Colours :

3CCT Switch : WW NW CW

2.4G (Dimmable & Tuneable)

Shapes : **Round**

Wattages
9W | 16W

Cutouts (mm)
45, 65

Dimensions (mm)
52, 73

Heights (mm)
56, 66

Beam Angle 24 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Bridgelux	**Dimmable & Tuneable** 2.4G Remote & App Control



ELARA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Black & White

Wattages
12W

Dimensions (mm)
90

Cutouts (mm)
75

Heights (mm)
95

Light Colours :

3CCT Switch : WW NW CW

2.4G (Dimmable & Tuneable)

Shapes : **Round**





Beam Angle
24 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control

Tiltable
Yes

WAMIQA

COB Downlight



Construction Material : Aluminium Die Cast
Body Colour : White & Black

Light Colours :

4CCT Switch : WW NW CW & 3 in 1

2.4G (Dimmable & Tuneable)

Shapes : **Round**

Reflector : **Rose Gold, Matt Black & White**



Beam Angle
36 Degree

CRI
> 90

PF
0.9PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Switch Tuneable
Yes

Dimmable & Tuneable
2.4G Remote & App Control

Wattages
9W | 15W

Dimensions (mm)
75, 90

Cutouts (mm)
65, 75

Heights (mm)
58, 65







VIONA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Bronze & White

Wattages
10W | 15W | 20W

Dimensions (mm)
70, 80, 90

Cutouts (mm)
65, 75, 85

Height (mm)
61, 70, 80

Beam Angle 36 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Bridgelux	Dimmable & Tuneable 2.4G Remote & App Control

Light Colours :

3CCT Switch : WW NW CW

2.4G (Dimmable & Tuneable)

Shapes : Round



PRIMA+

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White & Black

Light Colours :

WW NW CW

3CCT Switch (WW, NW, CW)

3 in 1 (WW, NW, CW)

2.4G (Dimmable & Tuneable)

Shapes : **Round**

Reflectors :
Matt White, Glossy White,
Gun Black & Rose Gold

Microprismatic Reflectors :
Black & Rose Gold

Wattages
7W | 12W | 18W

Dimensions (mm)
70, 85, 95

Cutouts (mm)
65, 80, 90

Heights (mm)
50, 65, 75



Beam Angle 24 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Bridgelux	**Dimmable & Tuneable** 2.4G Remote & App Control
Switch Tuneable Yes	

GIANA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Gun Metal



Light Colours :

WW NW CW

3CCT Switch (WW, NW, CW)

2.4G (Dimmable & Tuneable)

Shapes : **Round**

Reflectors : **Gun Metal & Rose Gold**

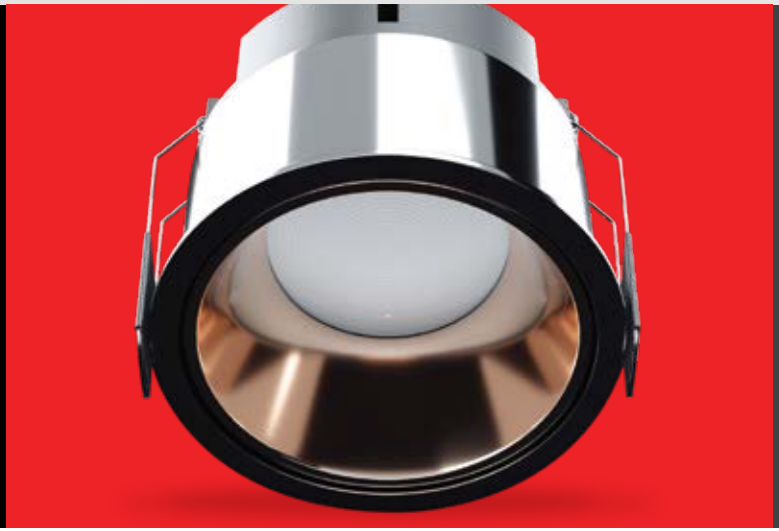

Beam Angle 40 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Bridgelux	**Dimmable & Tuneable** 2.4G Remote & App Control

Wattages
8W | 15W | 20W

Dimensions (mm)
67, 79, 92

Cutouts (mm)
63, 68, 84

Heights (mm)
50, 58, 66



NAYSA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Black

Wattages
12W + 8W

Dimensions (mm)
82

Cutouts (mm)
63

Heights (mm)
80

Light Colours :

WW NW CW

Shapes : **Round**



Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux



YESHA

COB Downlight



Construction Material : Aluminium Die Cast
Body Colour : Black & White

Light Colours :

WW NW CW

2.4G (Dimmable & Tuneable)

Shapes : **Round**



Beam Angle 40 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Bridgelux	**Dimmable & Tuneable** 2.4G Remote & App Control

Wattages
7W | 12W | 18W

Dimensions (mm)
63, 83, 95

Cutouts (mm)
55, 72, 85

Heights (mm)
60, 77, 97







KRETA+

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White & Black

Wattages
9W | 15W

Dimensions (mm)
85, 98

Cutouts (mm)
68, 91

Height (mm)
52, 60

Beam Angle 40 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Bridgelux	Tiltable Yes

Light Colours :

WW NW CW

Shapes : Round

Reflectors :
Gun Black, Champagne Gold,
Rose Gold, Matt White & Matt Black



KRIDHA

COB Downlight

Construction Material : Polycarbonate
Body Colour : Black

Light Colours :

WW NW CW

Red Green Blue Pink

Shapes : Round

Reflectors : Gun Black

Wattages
6W

Dimensions (mm)
110

Cutouts (mm)
75

Height (mm)
46





Beam Angle
40 Degree

CRI
>90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux



EVANA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White

Wattages
6W | 9W | 16W | 24W | 30W | 40W

Dimensions (mm)
78, 78, 97, 122, 122, 145

Cutouts (mm)
53, 68, 91, 117, 117, 137

Heights (mm)
60, 65, 70, 77, 77, 87

Light Colours :

WW NW CW

Shapes : **Round**



Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Tiltable
Yes









SPECTRA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White

Light Colours :

WW NW CW

Shapes : **Round**

Wattages
3W | 6W | 9W

Dimensions (mm)
68, 86, 100

Cutouts (mm)
55, 75, 89

Height (mm)
26, 26, 26

Beam Angle 40 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Bridgelux	**Tiltable** Yes



ZAMNA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White & Black

Wattages
3W

Dimensions (mm)
41

Cutouts (mm)
33

Heights (mm)
30

Light Colours :

WW NW

Shapes : Round

Reflector : White & Black





Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux







KRETA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White & Black

Wattages
3W

Dimensions (mm)
32

Cutouts (mm)
24

Height (mm)
30

Beam Angle 36 Degree	Lumens/Watt 110 Lm/w
PF 0.9 PF	IP Rating IP20
Surge Protection 2.5 kV	Led Chip Bridgelux

Light Colours :

WW NW

Shapes : **Round**

Reflector : **Rose Gold**



PRIMA+

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White & Black

Wattages
3W

Dimensions (mm)
38

Cutouts (mm)
28

Heights (mm)
30

Light Colours :

WW NW

Shapes : **Round**





Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

PRIMA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White, Black & Wooden



Light Colours :

WW NW CW

Red Green Blue

Pink Amber

Shapes : **Round**



Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Wattages
1W | 3W

Dimensions (mm)
32, 40

Cutouts (mm)
24, 30

Heights (mm)
24, 30



YAAMA+

COB Downlight

Construction Material : Polycarbonate
Body Colour : White

Wattages
3W

Dimensions (mm)
75

Cutouts (mm)
45

Height (mm)
26

Beam Angle 40 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Bridgelux	**Switch Tuneable** Yes

Light Colours :

WW NW CW

Red Green Blue

Pink

3 in 1 (WW, NW, CW)

3 in 1 (R, B, PK)

Shapes : **Round**







EVANA

COB Downlight

Construction Material : Polycarbonate
Body Colour : White

Wattages
3W

Dimensions (mm)
71

Cutouts (mm)
38

Heights (mm)
36

Light Colours :

WW NW CW

Red Green Blue Pink

3 in 1 (WW, NW, CW)

3 in 1 (R, B, PK)

Shapes : Round





Beam Angle 40 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Bridgelux	Switch Tuneable & Tiltable Yes







KRIDHA

COB Downlight

Construction Material : Polycarbonate
Body Colour : Black & White

Light Colours :

WW NW CW

Shapes : **Round**

Reflectors : **Rose Gold**

Wattages
3W

Dimensions (mm)
75

Cutouts (mm)
45

Height (mm)
36

Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux



Light Colours :

WW NW CW

Red Green Blue

Pink

Shapes : **Round**

SHAYA

COB Downlight

Construction Material : Polycarbonate
Body Colour : White

Wattages
2W

Dimensions (mm)
40

Heights (mm)
12

Cutouts (mm)
28



Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

IMPERIA+

COB Downlight

Construction Material : Polycarbonate
Body Colour : White



Light Colours :

WW NW CW

Red Green Blue Pink

Shapes : **Round**



Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Wattages
6W

Dimensions (mm)
110

Cutouts (mm)
63

Heights (mm)
45







KRISTA

COB Downlight

Construction Material : Polycarbonate
Body Colour : White

Light Colours :

WW NW CW

Red Green Blue

Pink

Shapes : Round

Wattages
3W | 5W

Dimensions (mm)
75, 110

Cutouts (mm)
55, 75

Height (mm)
43, 60

Beam Angle 40 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Bridgelux	Tiltable Yes

02.

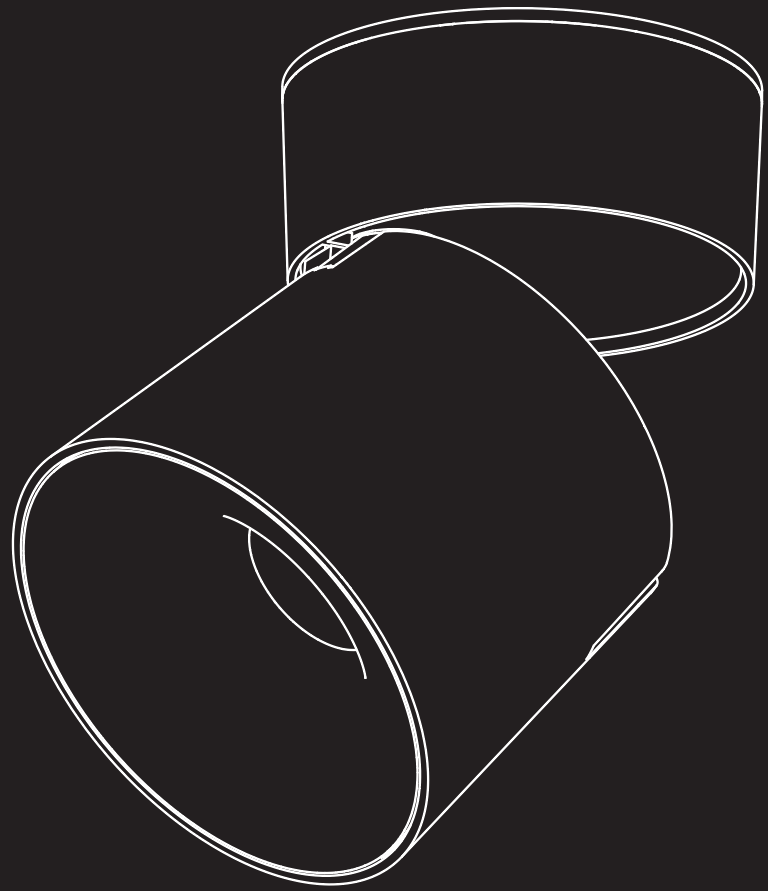

COB SURFACE

PERSIA

COB Surface



Construction Material : Aluminium Die Cast
Body Colour : Rose Pink & Matt Brown

Wattages
12W

Dimensions (mm)
75

Heights (mm)
80

Light Colours :

WW NW

Shapes : Round



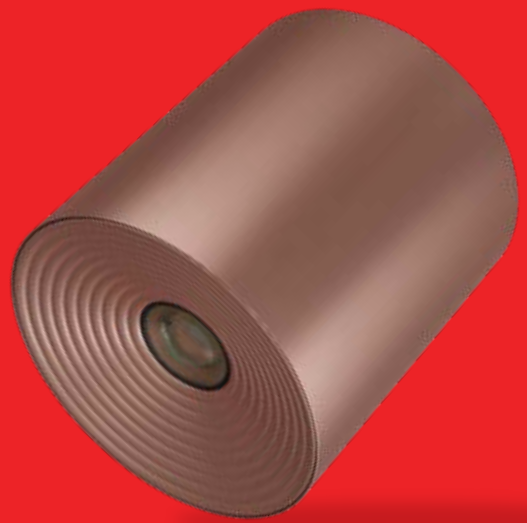

Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

CELIA

COB Surface



Construction Material : Aluminium Die Cast
Body Colour : Gun Black & Rose Gold

Light Colours :

WW NW

Shapes : **Round**

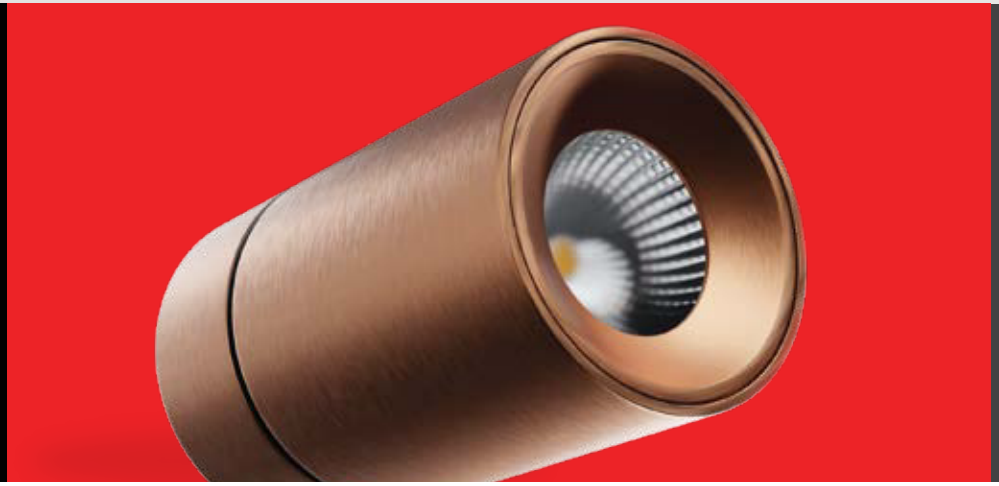

Beam Angle 40 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip CREE	**Tiltable** Yes

Wattages
12W

Dimensions (mm)
63

Heights (mm)
106

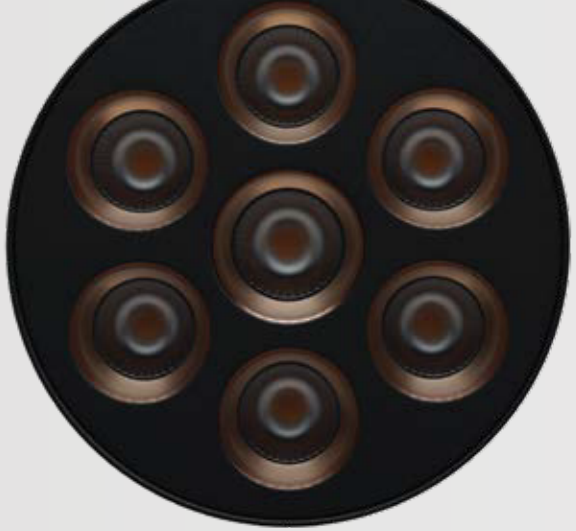

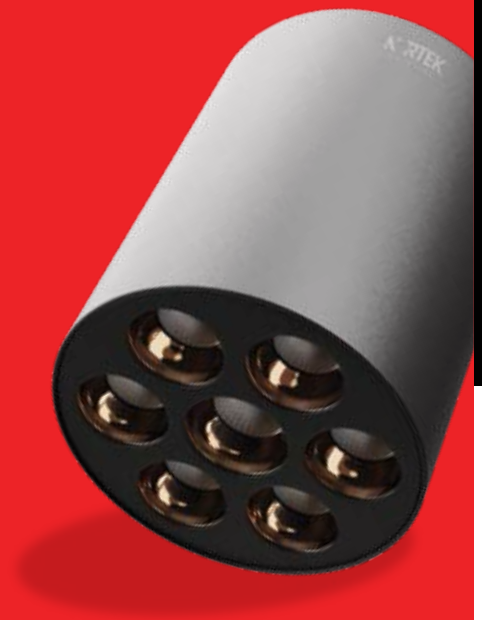



OPERA

COB Surface

Construction Material : Aluminium Die Cast
Body Colour : Black

Light Colours :

WW NW CW

3CCT Switch (WW, NW, CW)

Shapes : Round

Reflector : Gun Metal & Rose Gold

Wattages
6W | 14W

Dimensions (mm)
46, 74

Height (mm)
75, 75

Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
CREE



Wattages
12W

Dimensions (mm)
78

Height (mm)
95

Beam Angle 36 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Bridgelux	Tiltable Yes





FREYA

COB Surface

Construction Material : Aluminium Die Cast
Body Colour : Black

Light Colours :

WW NW

Shapes : Round

Reflector :
Gun Black & Rose Gold

Micro Prismatic Reflector :
Gun Black & Rose Gold



PLATINA+

COB Surface

Construction Material : Aluminium Die Cast
Body Colour : White & Black



Beam Angle 40 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Bridgelux	

Wattages
7W | 12W

Height (mm)
60, 67

Dimensions (mm)
56, 71

Light Colours :

WW

NW

Shapes : Round

Reflector : Gun Metal & Rose Gold



PLATINA

COB Surface

Construction Material : Aluminium Die Cast
Body Colour : Black

Wattages
12W | 18W

Dimensions (mm)
74, 88

Heights (mm)
110, 110

Light Colours :

WW NW

Shapes : Round

Reflector : Black & Rose Gold



Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

PLATINA+

COB Surface

Construction Material : Aluminium Die Cast
Body Colour : Black



Light Colours :

WW NW CW

Shapes : **Round**



Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP66

Led Chip
Bridgelux

Wattages
5W

Dimensions (mm)
61

Heights (mm)
15



Light Colours :

WW NW CW

Red Green Blue

Pink

Shapes : **Round**



Wattages
4W

Dimensions (mm)
75

Height (mm)
16

PLATINA

COB Surface

Construction Material : Aluminium Die Cast
Body Colour : White

Beam Angle
40 Degree

CRI
>90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux





SERENA

COB Surface

Construction Material : Aluminium Die Cast
Body Colour : White & Black

Wattages
3W

Dimensions (mm)
30

Heights (mm)
45

Light Colours :

WW NW CW

Shapes : Round

Rose Gold





Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

03.

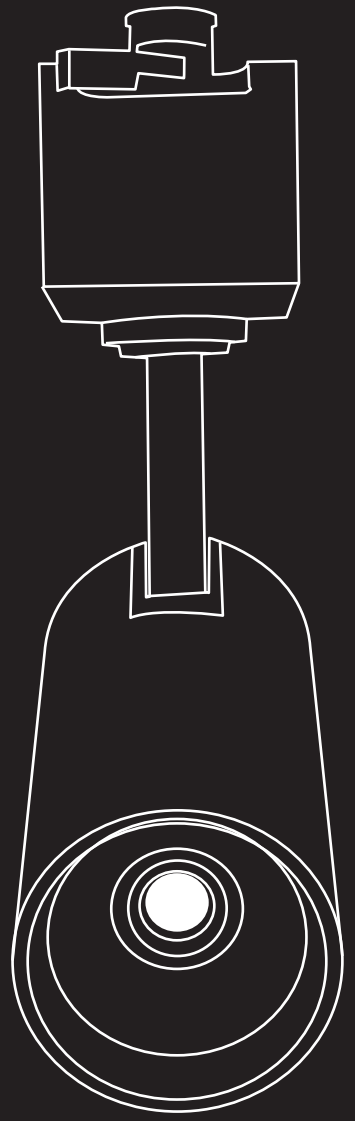

TRACK LIGHT







DAINA

Track Light

Construction Material : Aluminium Die Cast
Body Colour : Black & White

Wattages
10W | 20W | 30W

Dimensions (mm)
55, 73, 73

Base Length (mm)
115, 130, 155

Product Length (mm)
171, 187, 212

Beam Angle 36 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Bridgelux	Tiltable Yes

Light Colours :

3CCT Switch : WW NW CW

2.4G (Dimmable & Tuneable)

Shapes : Round

Reflectors :
Black, White, Rose Gold & Gun Black



DELLA

Track Light

Construction Material : Aluminium Die Cast
Body Colour : White & Black

Light Colours :

WW NW CW

Shapes : Round

Wattages
10W | 20W | 30W

Dimensions (mm)
57, 70, 80

Base Length (mm)
83, 120, 158

Product Length (mm)
152, 165, 173

Beam Angle 36 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Bridgelux	**Tiltable** Yes





DELLA+

Track Light

Construction Material : Aluminium Die Cast
Body Colour : Black



Light Colours :

WW NW CW

Round



Beam Angle 36 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Bridgelux	**Tiltable** Yes

Wattages
20W | 30W | 40W

Dimensions (mm)
47, 60, 75

Base Length (mm)
85, 95, 110

Product Length (mm)
119, 152, 190



BELLA

Track Light

Construction Material : Aluminium Die Cast
Body Colour : Black

Wattages
20W

Length (mm)
490

Wide (mm)
33

Heights (mm)
48

Light Colours :

WW NW CW

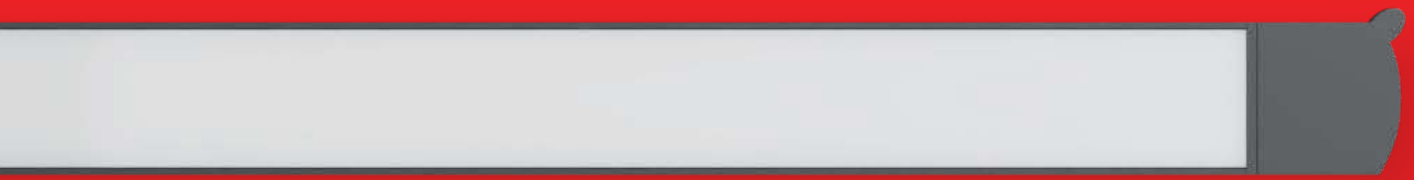

Beam Angle
120 Degree

CRI
>90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Tiltable
Yes

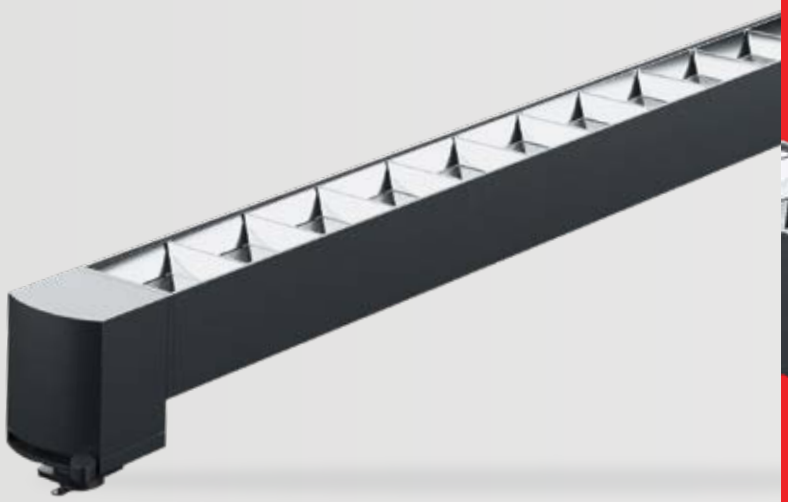





BELLA+

Track Light

Construction Material : Aluminium Die Cast
Body Colour : Black

Wattages
12W | 26W

Length (mm)
280, 478

Wide (mm)
33, 33

Height (mm)
48, 48

Beam Angle 120 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Bridgelux	**Tiltable** Yes

Light Colours :

WW NW CW

04.

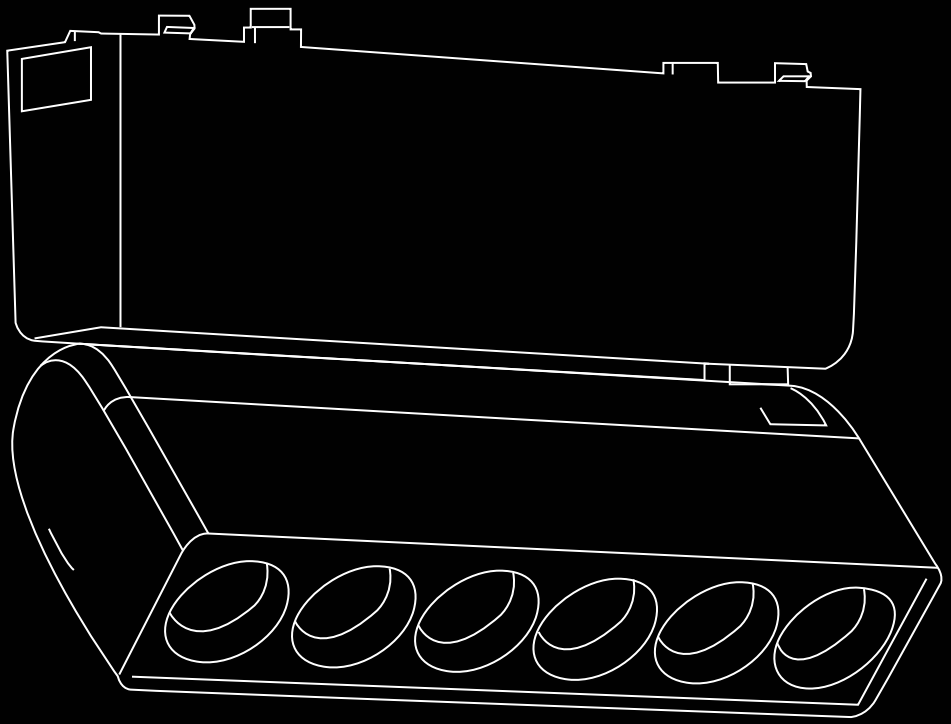

MAGNETIC TRACK LIGHT







SHLOKA

SA- 01

Magnetic Track

Construction Material : Aluminium Die Cast
Body Colour : Black

Wattages
12W | 18W
24W | 30W

Length (mm)
222, 330, 449, 546

Wide(mm)
26, 26, 26, 26

Heights (mm)
24, 24, 24, 24

Beam Angle 110 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip OSRAM	**Dimmable & Tuneable** 2.4G Remote & App Control

Light Colours :
2.4G (Dimmable & Tuneable)



Wattages
6W | 12W | 18W

Length (mm)
115, 221, 330

Wide(mm)
26, 26, 26

Heights (mm)
24, 24, 24

Beam Angle
24 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
OSRAM

Dimmable & Tuneable
2.4G Remote & App Control

SHLOKA
SA- 02
Magnetic Track

Construction Material : Aluminium Die Cast
Body Colour : Black

Light Colours :

2.4G (Dimmable & Tuneable)

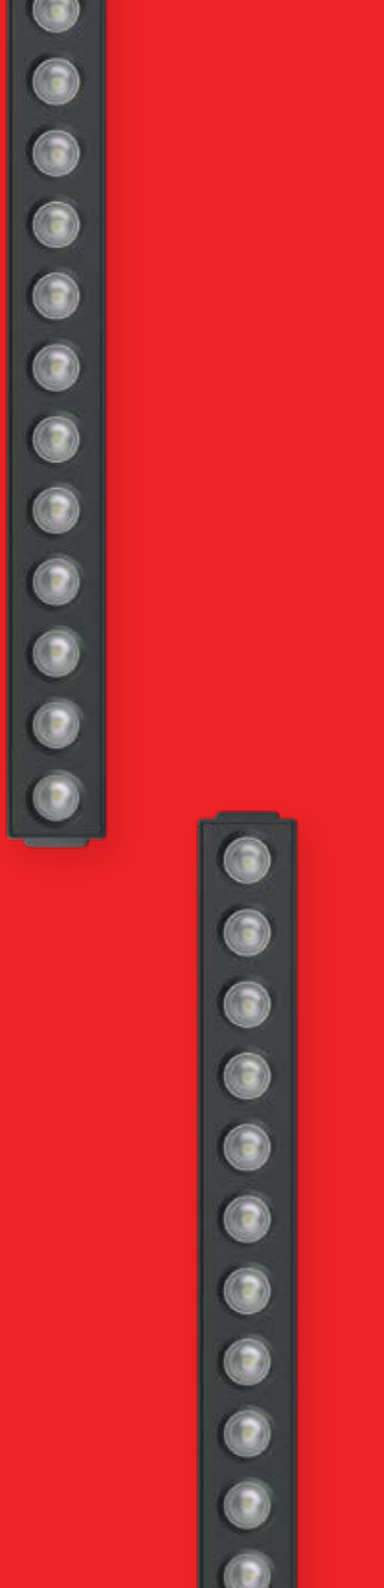





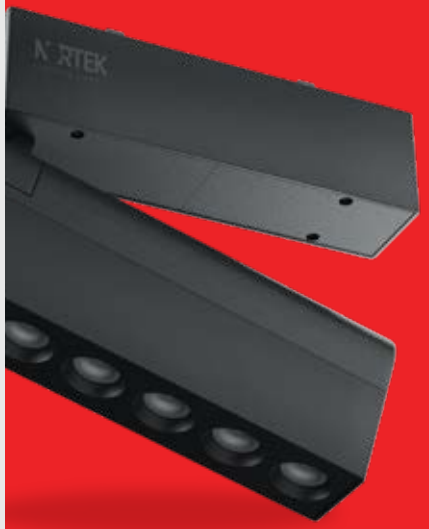

SHLOKA
SA- 06
Magnetic Track

Construction Material : Aluminium Die Cast
Body Colour : Black

Wattages
6W

Length (mm)
112

Wide(mm)
25

Heights (mm)
43

Beam Angle
24 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
OSRAM

Dimmable & Tuneable
2.4G Remote & App Control

Light Colours :

2.4G (Dimmable & Tuneable)

SHLOKA
SA- 07
Magnetic Track

Construction Material : Aluminium Die Cast
Body Colour : Black



Light Colours :

2.4G (Dimmable & Tuneable)

Shapes : Round

Wattages I Size
10W | 20W | 30W

Product Length (mm)
105, 130, 155

Dimensions (mm)
47, 57, 67

Base Length (mm)
113, 113, 113

Base Width (mm)
25, 25, 25





Beam Angle 24 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip OSRAM	**Dimmable & Tuneable** 2.4G Remote & App Control

SHLOKA

Accessories



M DRIVER

100w | 200w Driver
Volt: 48v

Length (mm)	Width(mm)
500, 1000	25, 25

TR-01 JOINTERS



Straight & L Jointer
90 Vertical Jointer

Width(mm)
25



SA-TR01

Slim Surface Track

Construction Material :
Aluminium Die Cast & Copper

Length	Width (mm)
1Mtr | 2Mtr	25

TR-04



L Jointer
90 Vertical Jointer

Width(mm)
25

SA-TR04

Recessed Track



Construction Material :
Aluminium Die Cast & Copper

Length	Width(mm)
1Mtr | 2Mtr	25

SA-SP 04



Connection Module

Width(mm)
25

REMOTE



2.4g Remote Controller

05.

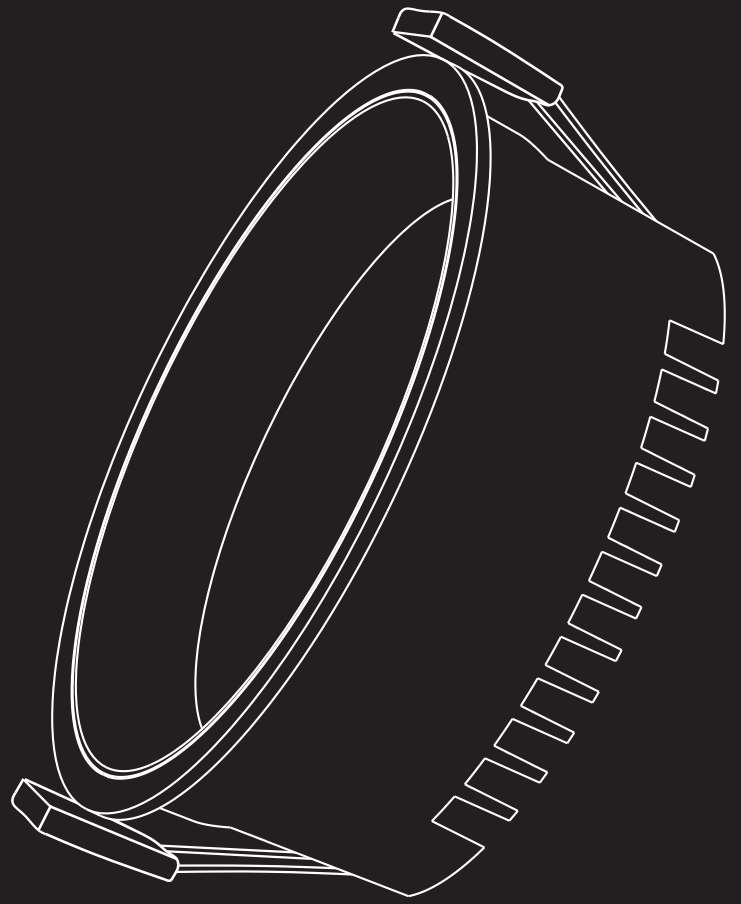

DOWNLIGHT







BREZZA

Downlight

Construction Material : Aluminium Die Cast
Body Colour : White & Black

Wattages
12W | 18W | 24W

Dimensions (mm)
100, 130, 150

Cutouts (mm)
95, 125, 145

Height (mm)
50, 50, 50

Beam Angle 120 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Bridgelux	**Dimmable & Tuneable** 2.4G Remote & App Control

Light Colours :

3CCT Switch : WW NW CW

2.4G (Dimmable & Tuneable)

Shapes : **Round**

Reflector :
Gun Black, Rose Gold, Matt Black & Matt White

IMAGINA

Downlight

Construction Material : Aluminium Die Cast
Body Colour : White



Light Colours :

WW NW CW

3 in 1 (WW, NW, CW)

2.4G (Dimmable & Tuneable)

Shapes : Round & Square



Beam Angle 60 Degree	**CRI** > 90	**Switch Tuneable** Yes
PF 0.9 PF	**Lumens/Watt** 110 Lm/w	
Surge Protection 2.5 kV	**IP Rating** IP20	
Led Chip Bridgelux	**Dimmable & Tuneable** 2.4G Remote & App Control	

Wattages
12W | 18W

Dimensions (mm)
120, 154

Cutouts (mm)
115, 150

Heights (mm)
50, 55



INAAYA

Downlight

Construction Material : Polycarbonate
Body Colour : White

Wattages
6W | 12W

Dimensions (mm)
118, 143

Cutouts (mm)
100, 125

Height (mm)
38, 38

Light Colours :

4CCT Switch : WW NW CW & 3 in 1

Shapes : Round



Beam Angle 120 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Epistar	Switch Tuneable Yes



SHIVA

Downlight

Construction Material : Polycarbonate
Body Colour : White

Beam Angle 120 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Epistar	

Wattages
10W | 15W | 20W

Cutouts (mm)
99, 129, 149

Dimensions (mm)
116, 144, 166

Heights (mm)
22, 22, 22

Light Colours :

WW NW CW

Shapes : Round





SIFRA+

Downlight



Construction Material : Polycarbonate
Body Colour : White





Light Colours :

WW NW CW

Shapes : **Round**

Wattages
12W

Cutouts (mm)
102

Dimensions (mm)
130

Height (mm)
29

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



RHAYA

Downlight

Construction Material : Aluminium Die Cast
Body Colour : Black & White

Wattages
7W | 12W | 18W

Dimensions (mm)
60, 80, 90

Cutouts (mm)
47, 56, 63

Heights (mm)
53, 62, 69

Light Colours :

3 CCT Switch : WW NW CW

2.4G (Dimmable & Tuneable)

Shapes : Round

Reflectors : Matt Black, Matt White & Gun Metal





Beam Angle 40 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Bridgelux	Dimmable & Tuneable 2.4G Remote & App Control



ZIGMA

Downlight

Construction Material : Polycarbonate
Body Colour : White

Wattages
6W | 12W | 18W

Dimensions (mm)
118, 143, 165

Cutouts (mm)
100, 125, 150

Heights (mm)
28, 28, 28

Light Colours :

3CCT Switch : WW NW CW

Shapes : Round & Square

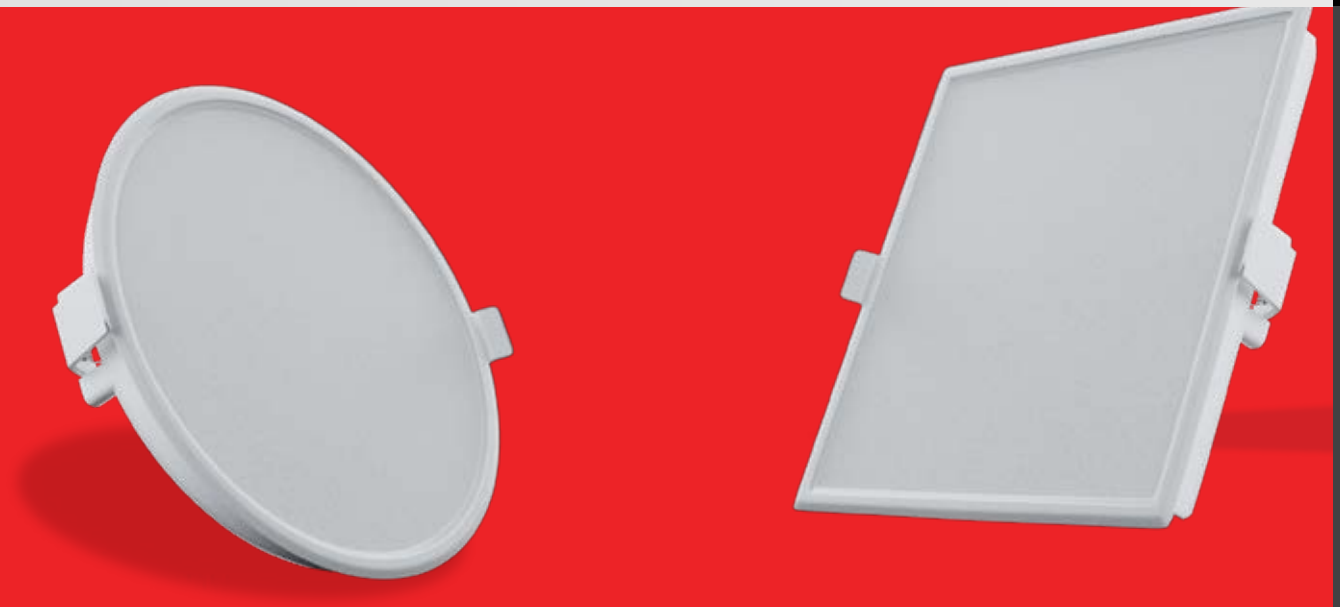

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar







LUMIA+

Downlight

Construction Material : Polycarbonate
Body Colour : White

Wattages
6W | 12W | 18W

Dimensions (mm)
118, 143, 166

Cutouts (mm)
100, 125, 150

Height (mm)
38, 38, 38

Beam Angle 120 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Epistar	Switch Tuneable Yes

Light Colours :
3 in 1 (WW, NW, CW)
Shapes : Round & Square

YAAMA

Downlight

Construction Material : Polycarbonate
Body Colour : White & Black



Light Colours :

3CCT Switch : WW NW CW

Shapes : **Round**



Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

Wattages
15W

Dimensions (mm)
109

Cutouts (mm)
75

Heights (mm)
30

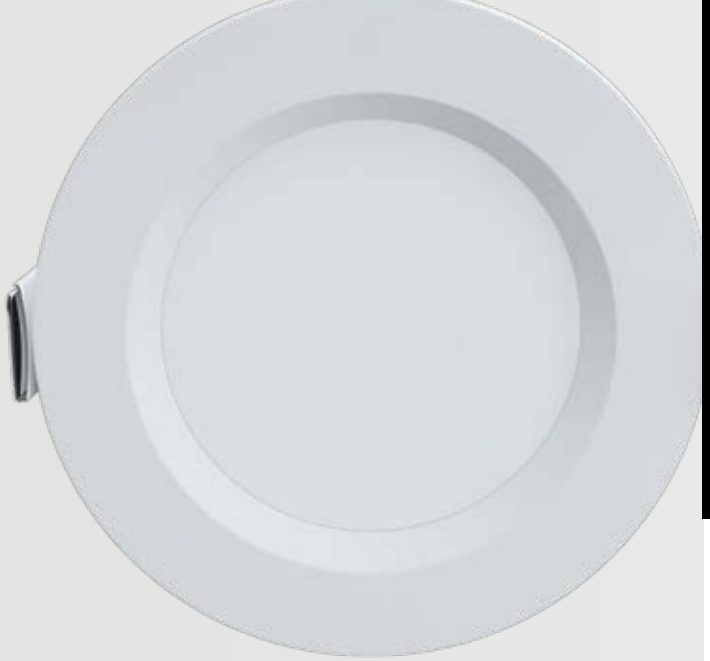

Light Colours :

WW NW CW

Red Green Blue

Pink

Shapes : Round



Wattages
7W

Dimensions (mm)
110

Cutouts (mm)
63

Height (mm)
40

RETHA

Downlight

Construction Material : Polycarbonate
Body Colour : White

Beam Angle 90 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Epistar	

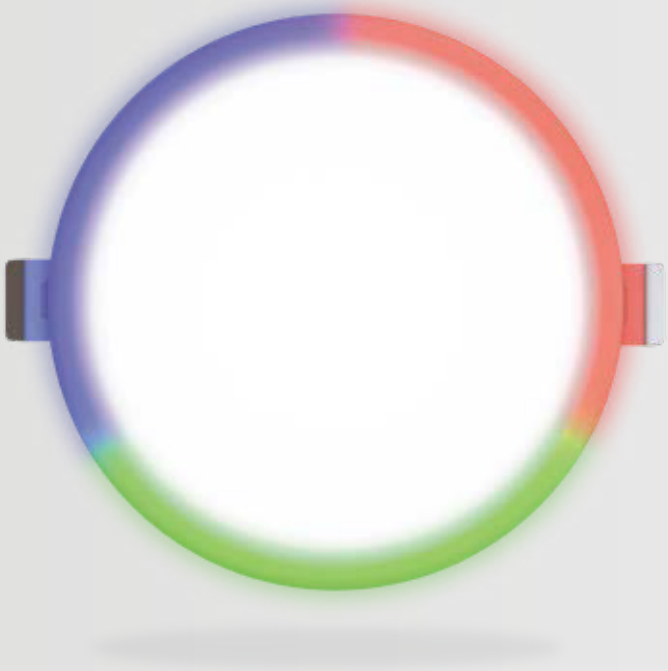





Light Colours :

CW+CW CW+WW

CW+B CW+PK

CW+PGB CW+RGB

Shapes : **Round**

Wattages
7W + 7W
12W + 12W (Adjustable Concealed)

Dimensions (mm)
85, 130

Cutouts (mm)
43, 50

Height (mm)
20, 20

JOFRA

Downlight

Construction Material : Polycarbonate
Body Colour : White

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



LEEZA+

Downlight

Construction Material : Polycarbonate
Body Colour : White

Wattages
6W

Dimensions (mm)
110

Cutouts (mm)
63

Heights (mm)
15

Light Colours :

WW NW CW

Red Green Blue

Pink

Shapes : Round

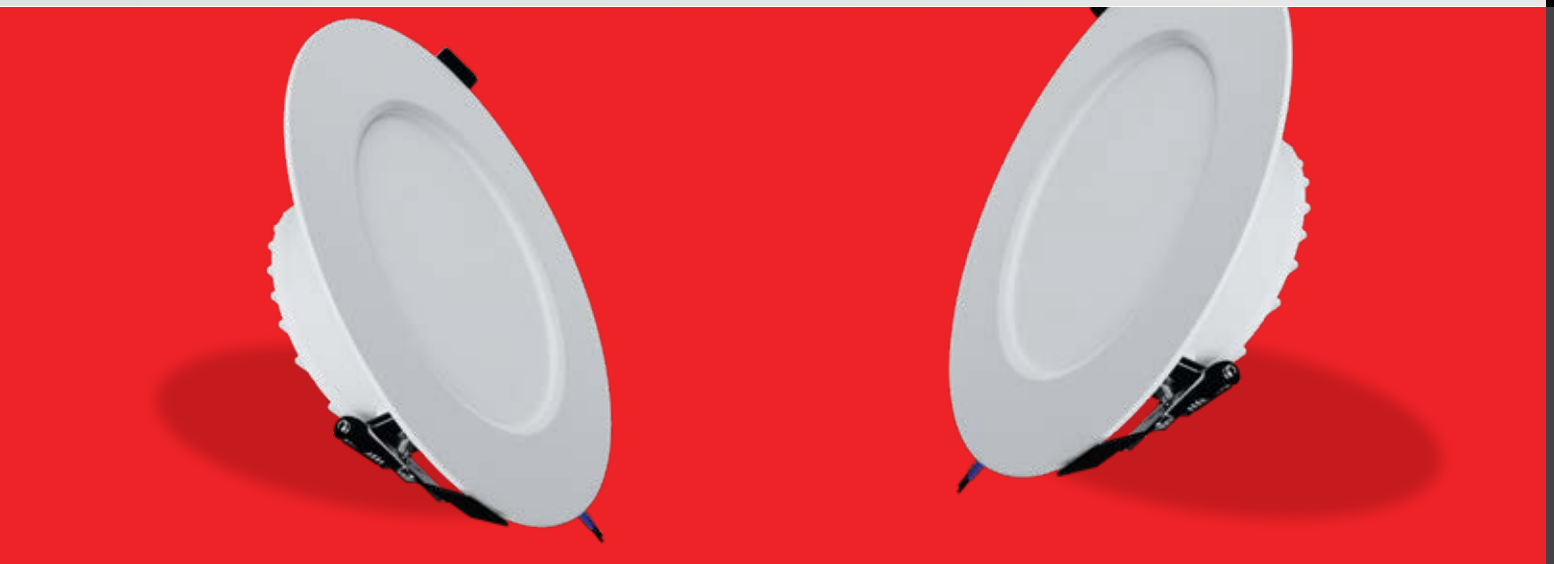

Beam Angle
90 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



TRISA

Downlight

Construction Material : Polycarbonate
Body Colour : White

Light Colours :

3 in 1 (WW, NW, CW)

3 in 1 (R, B, PK)

Shapes : Round



Beam Angle
90 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

Switch Tuneable
Yes

Wattages
7W

Dimensions (mm)
110

Cutouts (mm)
63

Heights (mm)
40

LEEZA

Downlight





Construction Material : Polycarbonate
Body Colour : White

Light Colours :

WW NW CW

Red Green Blue

Pink

Shapes : Round

Wattages
6W

Cutouts (mm)
63

Dimensions (mm)
106

Heights (mm)
20

Beam Angle
90 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



YAAMA

Downlight

Construction Material : Polycarbonate
Body Colour : White

Light Colours :

WW NW CW

Red Green Blue

Pink

3 in 1 (WW, NW, CW)

3 in 1 (R, B, PK)

Shapes : Round

Wattages
3W | 9W

Dimensions (mm)
75, 107

Cutouts (mm)
45, 73

Height (mm)
26, 29

Beam Angle 60 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Epistar	Switch Tuneable Yes





LIVIA

Downlight

Construction Material : Polycarbonate
Body Colour : White

Wattages
3W

Dimensions (mm)
75

Cutouts (mm)
45

Heights (mm)
45

Light Colours :

WW NW CW

Red Green Blue

Pink

3 in 1 (WW, NW, CW)

3 in 1 (R, B, PK)

Shapes : Round





Beam Angle 60 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Epistar	Switch Tuneable Yes







KAASA

Downlight

Construction Material : Polycarbonate
Body Colour : White

Wattages
7W

Dimensions (mm)
80

Cutouts (mm)
41

Height (mm)
35

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

Light Colours :

WW NW CW

Red Green Blue

Pink

Shapes : Round

ZEEYA

Downlight

Construction Material : Polycarbonate
Body Colour : White



Light Colours :

WW CW Red

Green Blue Pink

Shapes : **Round**



Beam Angle
90 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

Wattages
3W

Dimensions (mm)
77

Cutouts (mm)
48

Heights (mm)
25

06.

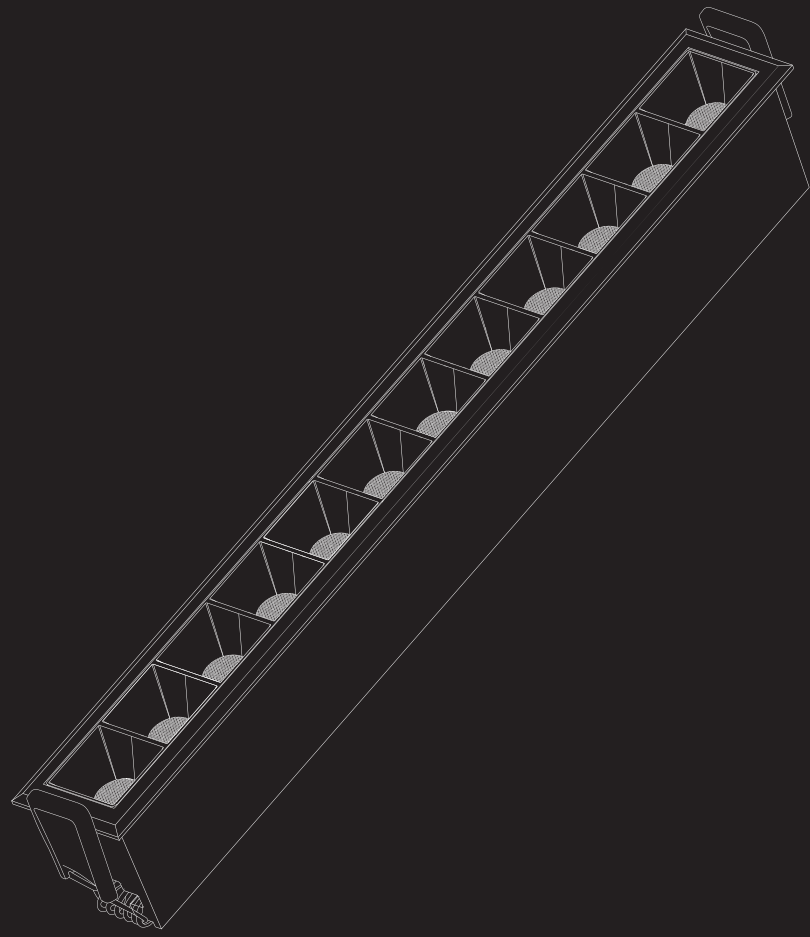

LINEAR SPOT



CELINA

Linear Spot Light

Construction Material : Aluminium Die Cast
Body Colour : Matt Black & Matt White

Light Colours :

4CCT Switch : WW NW CW & 3 in 1

2.4G (Dimmable & Tuneable)

Shapes : Linear

Wattages
15W | 30W

Dimensions (mm)
91 X 55 X 64
162 X 55 X 64

Cutouts (inches)
77 X 45
147 X 45



Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

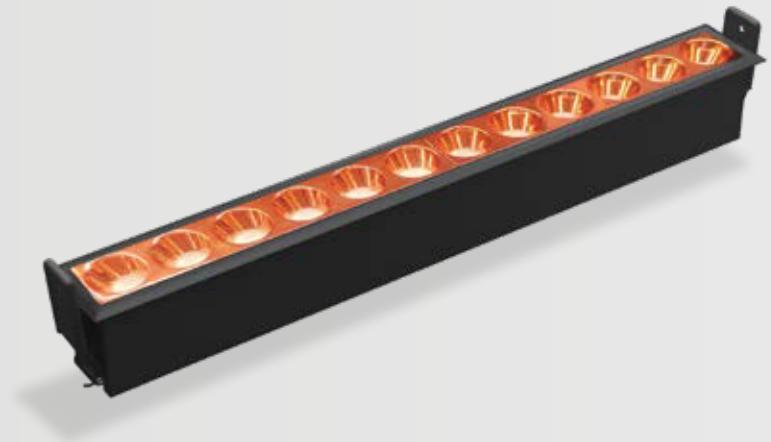

Light Colours :

WW NW CW

Shapes : Linear

Reflector : Black & Rose Gold



Wattages
5W | 10W | 20W

Dimensions (mm)
68 X 30 X 35
125 X 30 X 35
240 X 30 X 35

Cutouts (inches)
64 X 26
120 X 26
235 X 26



DELTA

Linear Spot Light

Construction Material : Aluminium Die Cast
Body Colour : White & Black

Beam Angle
24 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

ELIZA

Linear Spot Light



Construction Material : Aluminium Die Cast
Body Colour : Black

Light Colours :

3CCT Switch : WW NW CW

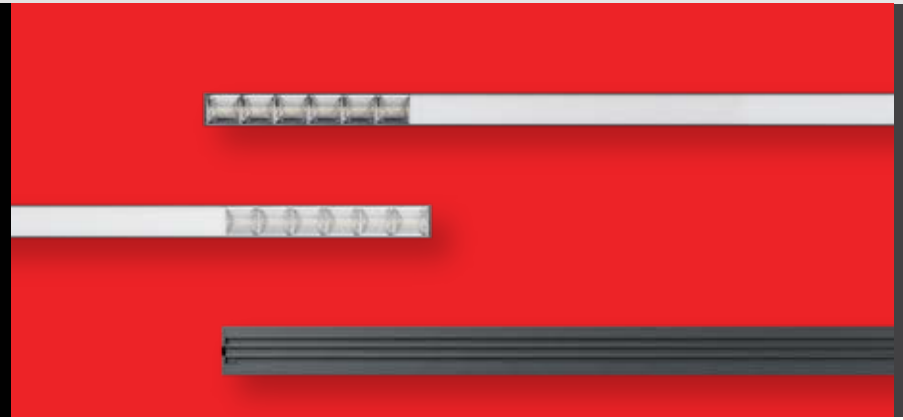

Beam Angle 120 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Bridgelux	

Wattages I Size	Length (mm)	Wide(mm)	Heights (mm)
42W | 45W | 4FT	1833, 1833	33, 33	56, 56

MAGNA

Linear Profile Light

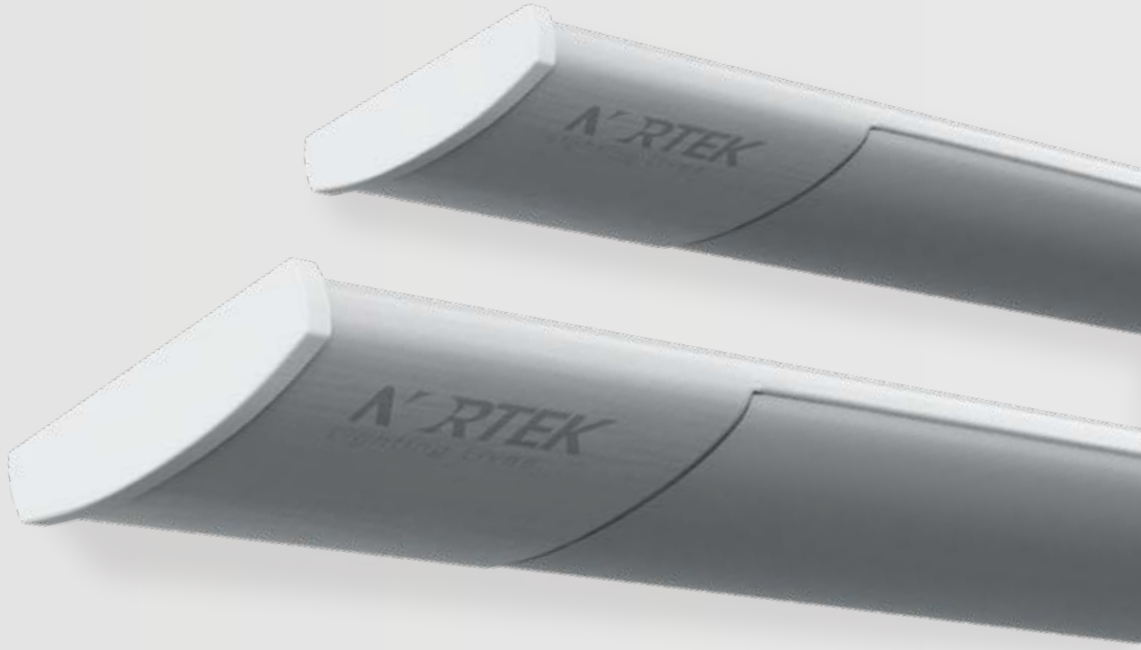

Construction Material : Aluminium Die Cast
Body Colour : Black

Light Colours :

WW NW CW

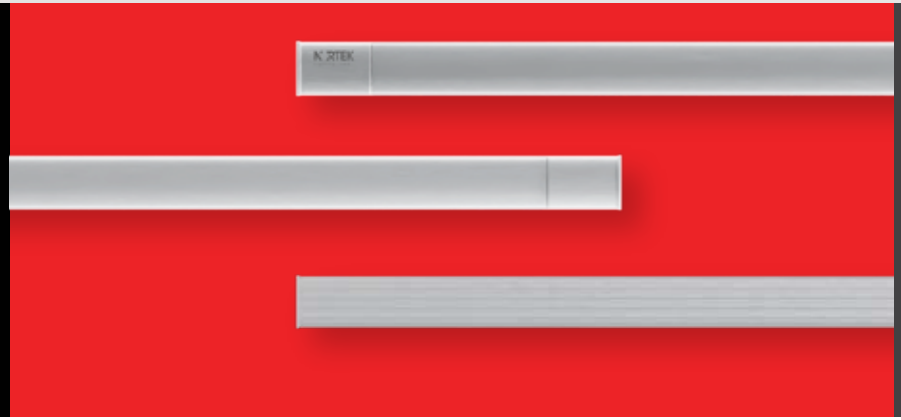

Beam Angle 120 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Bridgelux	

Wattages I Size	Length (mm)	Wide(mm)	Heights (mm)
5W | 10W | 1FT | 2FT	293, 583	18, 18	8, 8

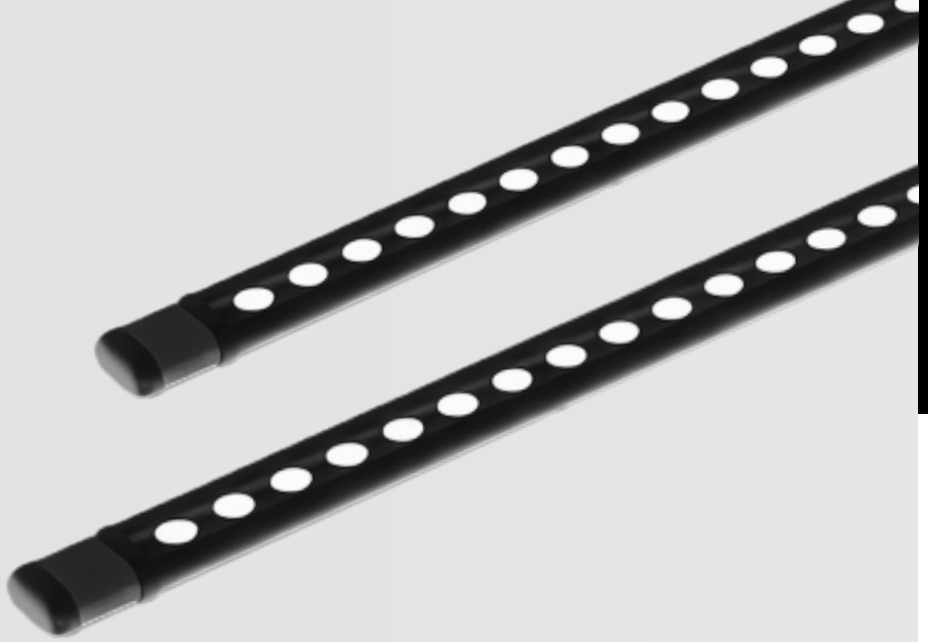

LARISA

Linear Hanging Light

Construction Material : Aluminium Die Cast + Polycarbonate
Body Colour : Black

Light Colours :

3CCT Switch : WW NW CW

Wattages
40W

Length (mm)
1150

Wide(mm)
45

Heights (mm)
32

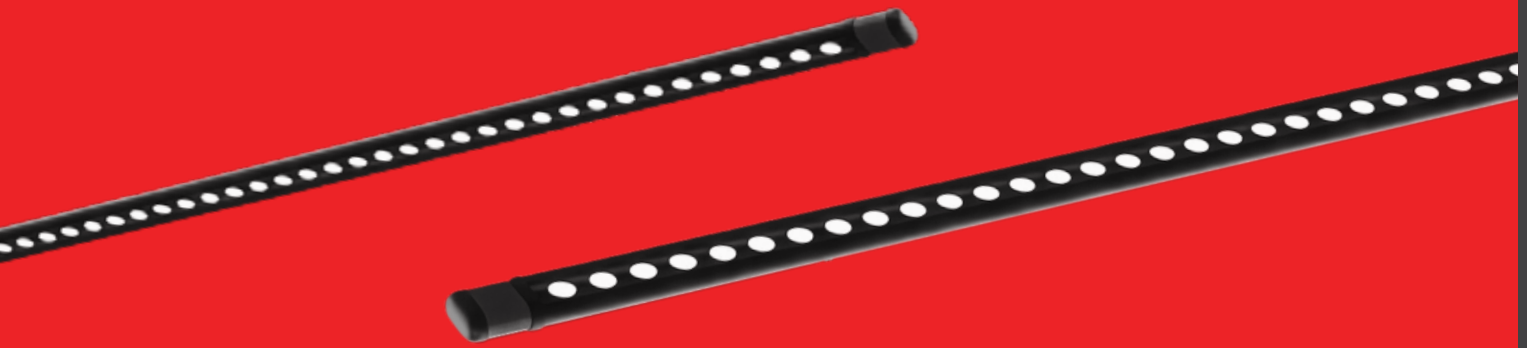

Beam Angle
24 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

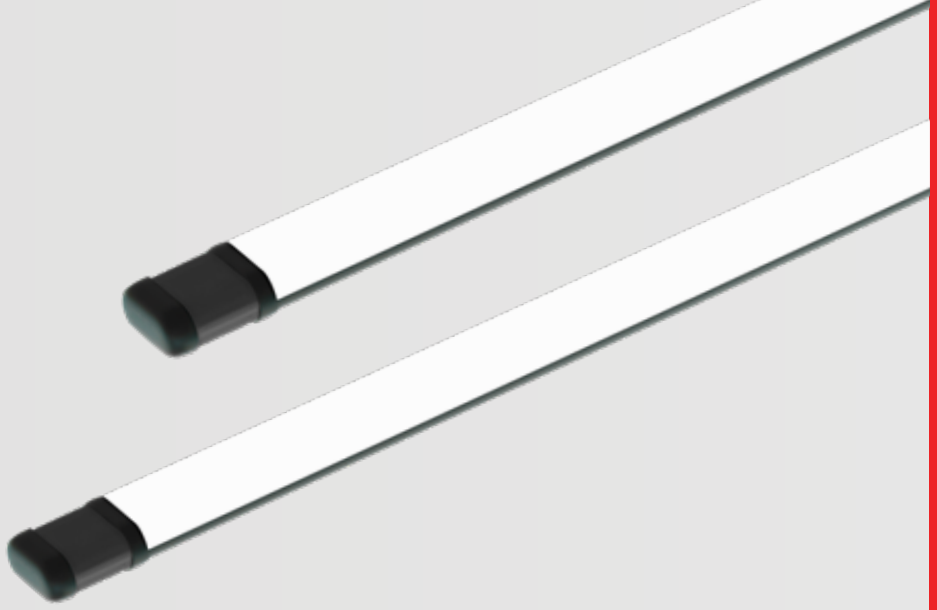



LARISA+

Linear Hanging Light

Construction Material : Aluminium Die Cast + Polycarbonate
Body Colour : Black

Light Colours :

3CCT Switch : WW NW CW

Wattages
40W

Wide(mm)
45

Length (mm)
1150

Heights (mm)
32

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

07

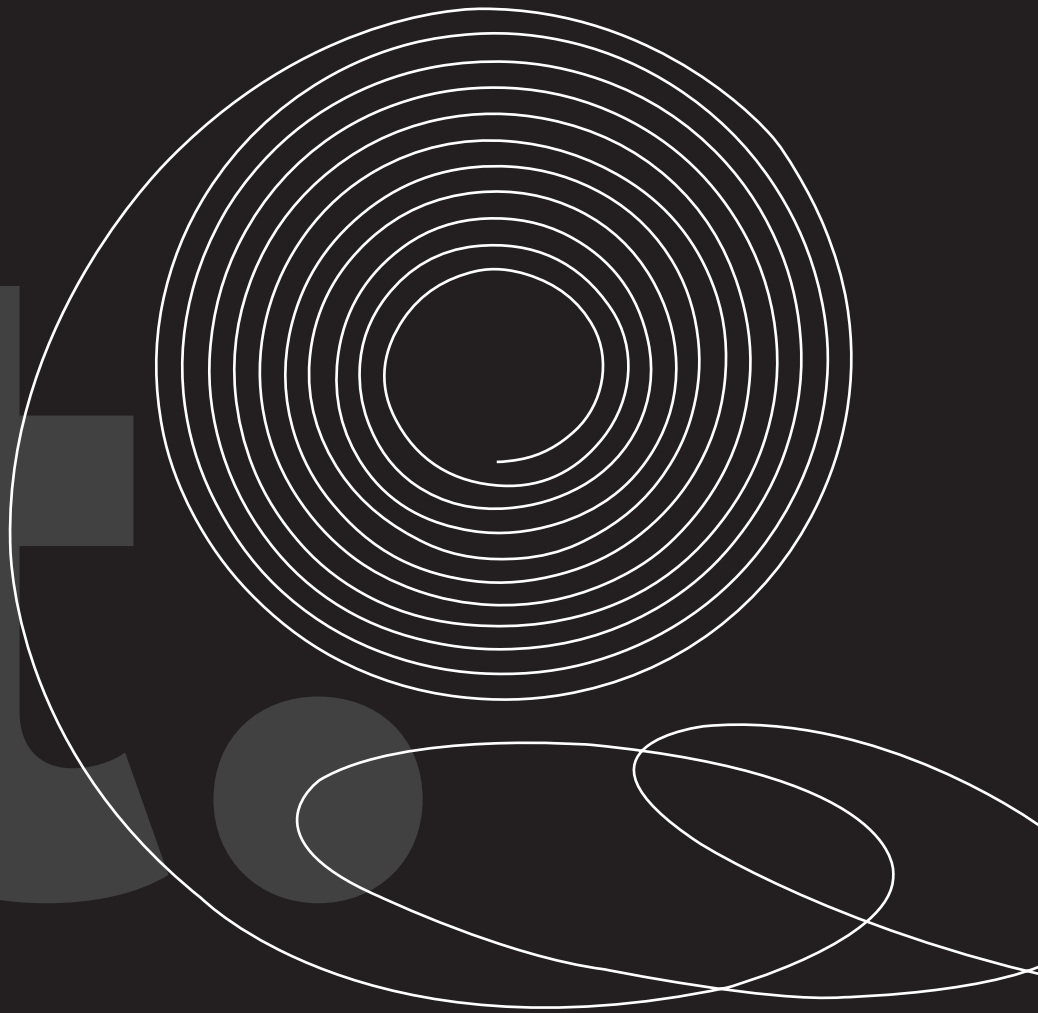

ROPE LIGHT

SIWANA

LED Rope Light

Construction Material : Silicon



Light Colours :

WW NW CW

Red Green Blue

Pink Amber IB



LED/MTR 120	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP66
Led Chip 2835	PCB Width 10mm

Wattages
10W/MTR

Size (mtr)
50 MTR

OLIVIA

LED Rope Light

Construction Material : Silicon
Body Colour : White



Wattages
8W/MTR

Size (mtr)
50 MTR

LED/MTR 120 | 60	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP66
Led Chip 2835	PCB Width 10mm

Light Colours :

6 in 1 (R, G, B, PK, WW, NW)





EUREKA

LED Rope Light

Construction Material : Silicon
Body : Flexible Rope

Wattages
12W/MTR

Size (mtr)
100 MTR

Light Colours :
WW NW CW

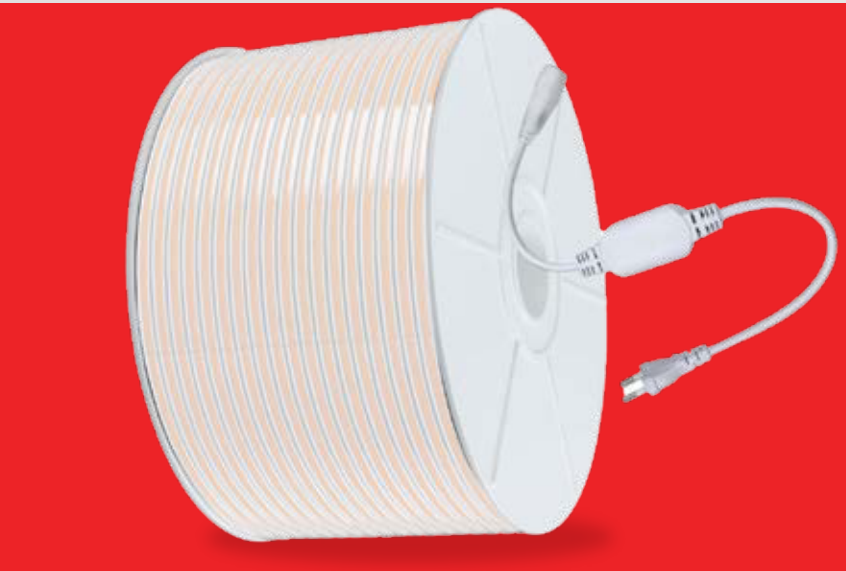

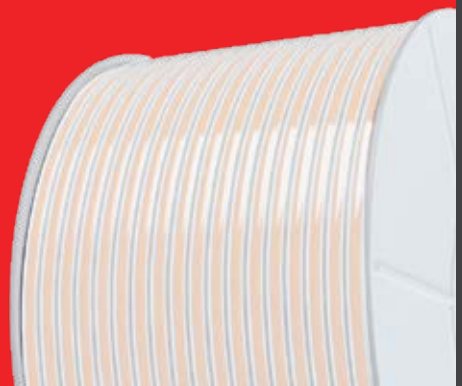

LED/MTR 288/M	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP66
Led Chip 2835	PCB Width 12mm





CONTRA

LED Rope Light

Construction Material : Silicon
Body : Flexible Rope

Light Colours :

WW NW CW
Red Green Blue
Pink Amber IB

LED/MTR 288/M	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP66
Led Chip 2835	PCB Width 12mm

Wattages
12W/MTR

Size (mtr)
50MTR
100 MTR





FLEXA

LED Rope Light

Construction Material : Silicon
Body Colour : White

Wattages
6W/MTR

Size (mtr)
50 MTR

LED/MTR 120 | 60	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP66
Led Chip 2835 | 5050	PCB Width 10mm

Light Colours :

WW NW CW
Red Green Blue
Pink Amber IB
RGB



Light Colours :

WW NW CW

Red Green Blue

Pink Amber IB



Wattages
6W/MTR

Size (mtr)
50 MTR



FLEXA+

LED Rope Light

Construction Material : Silicon
Body Colour : White

LED/MTR 120	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP66
Led Chip 2835	PCB Width 10mm

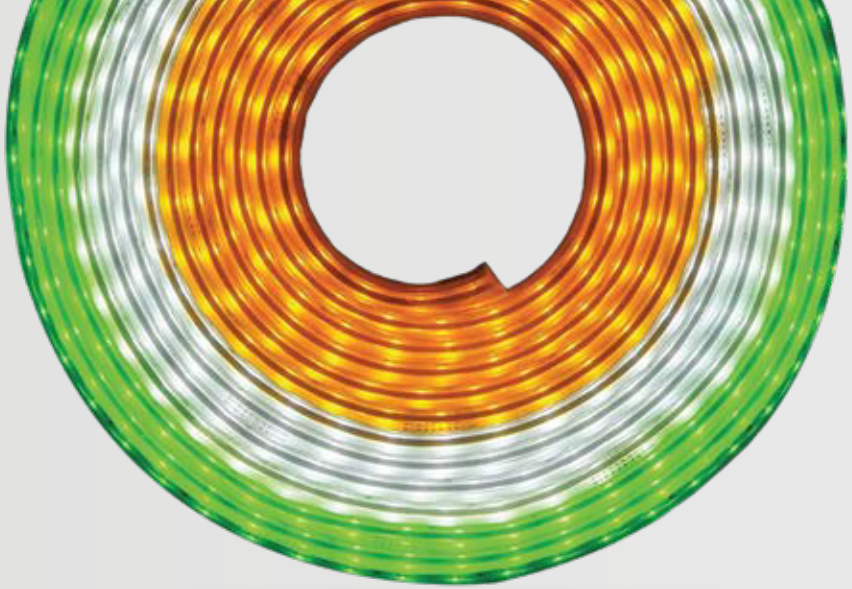

Light Colours :

Amber

CW

G

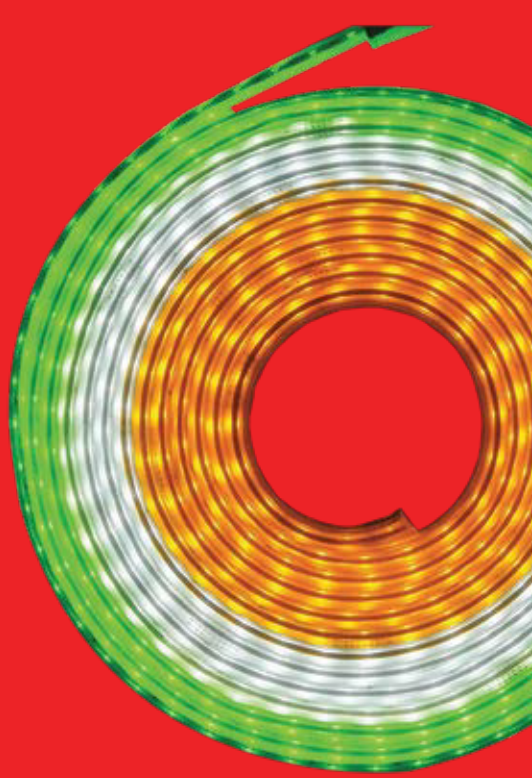

Wattages
12W/MTR

Size (mtr)
30 MTR (10-10-10)

TIRANGA

LED Rope Light

Construction Material : Silicon
Body Colour : White

LED/MTR 120	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP66
Led Chip 2835	PCB Width 12mm

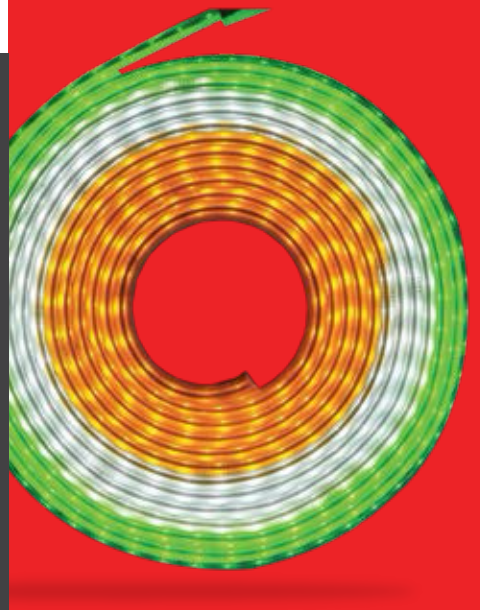

08

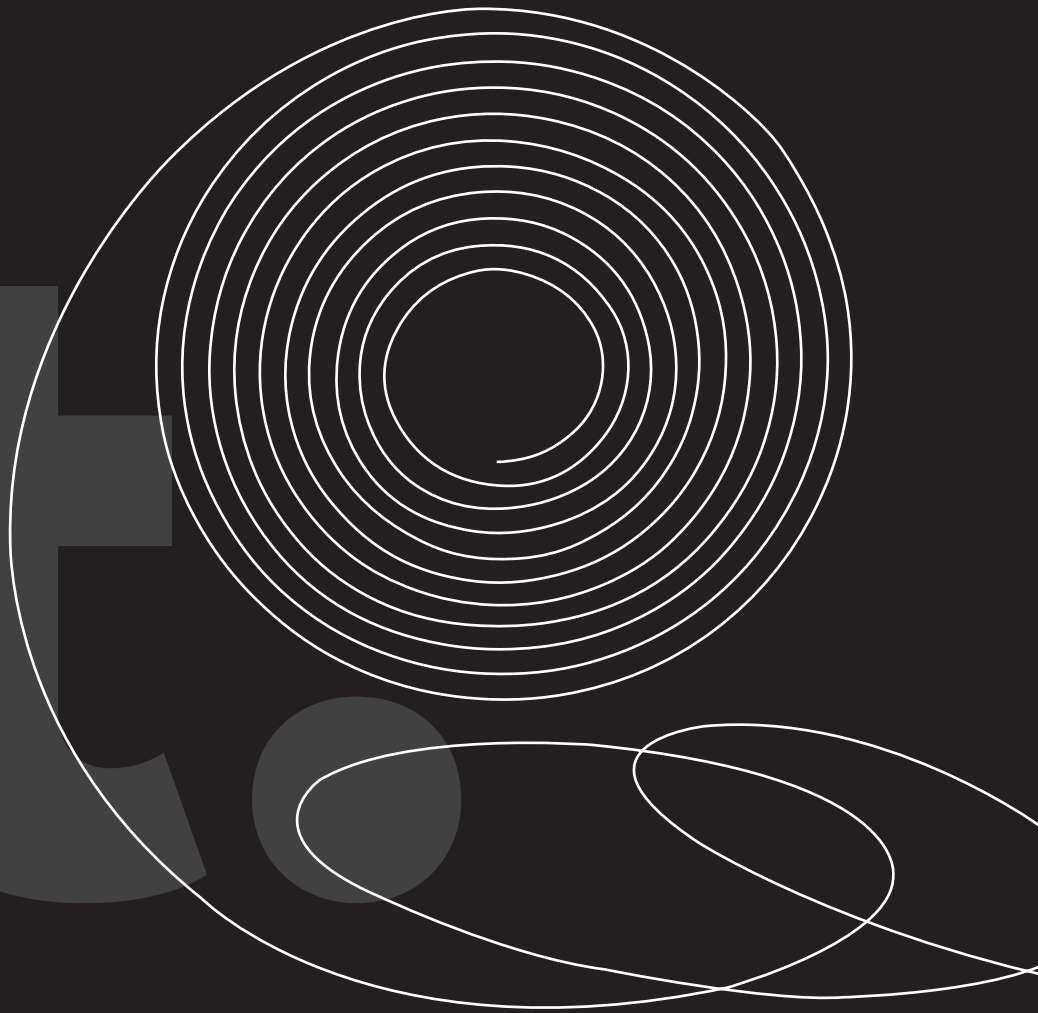

STRIP LIGHT

TISYA

COB Strip Light

Construction Material : Copper



Wattages
12W/MTR

Size (mtr)
5 MTR
10 MTR

Light Colours :

WW NW CW

Red Green Blue

Pink Amber IB

3 in 1 (WW, NW, CW)





LED/MTR
480

CRI
> 90

PCB Width
8mm | 5mm

Lumens/Watt
110 Lm/w

Voltage
24V

IP Rating
IP65

Dimmable & Tuneable
2.4G Remote & App Control



NITYA

LED Strip Light

Construction Material : Copper





Light Colours :

WW NW CW

LED/MTR 120 | 240	CRI > 90	Voltage 12V | 24V	IP Rating IP20
PCB Width 5mm | 10mm	Lumens/Watt 110 Lm/w	Led Chip 2835	

Wattages
20W/MTR

Size (mtr)
5 MTR

LAURA

LED Strip Light

Construction Material : Copper



Light Colours :

3 in 1 (WW, NW, CW)

2.4G (Dimmable & Tuneable)

LED/MTR 240	CRI > 90
PCB Width 10mm	Lumens/Watt 110 Lm/w
Voltage 24V	IP Rating IP20
Led Chip 2835	Dimmable & Tuneable 2.4G Remote & App Control





Wattages
24W/MTR

Size (mtr)
5 MTR

INFRA

LED Strip Light

Construction Material : Copper



Light Colours :

WW NW CW



LED/MTR
240

CRI
> 90

PCB Width
110mm

Lumens/Watt
110 Lm/w

Voltage
12V

IP Rating
IP20

Led Chip
2835

Wattages
12W/MTR | 15W/MTR

Size (mtr)
5 MTR

REGALIA

LED Strip Light

Construction Material : Aluminium & Copper



Wattages
6W/MTR | 12W/MTR
15W/MTR | 18W/MTR

Size (mtr)
5 MTR

Light Colours :

WW NW CW

Red Green Blue

Pink Amber IB





LED/MTR
60 | 120 | 180 | 240

CRI
> 90

PCB Width
5mm | 8mm | 10mm

Lumens/Watt
110 Lm/w

Voltage
12V

IP Rating
IP20

Led Chip
2835 | 4040

09.

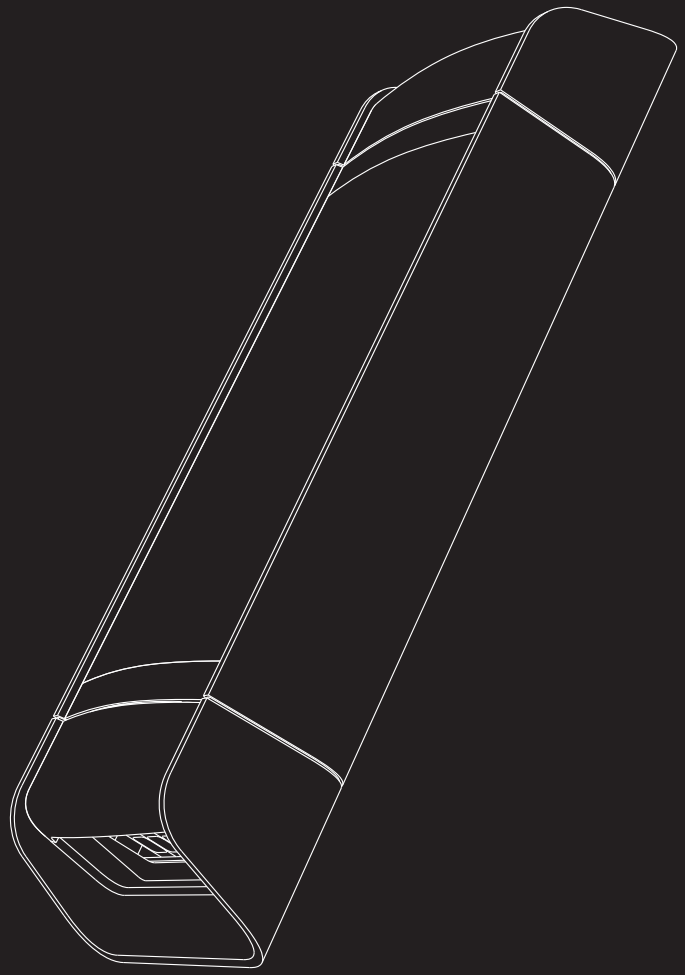

LED DRIVER





GAAMA+

LED Driver

Construction Material : Aluminium Die Cast
Body Colour : Black

Wattages
200W | 400W

Ampere
8.3Amp | 16.6Amp

24V LED Driver

- Dimmable
- Tuneable Driver
- 2.4G Remote & App Control





GAAMA

LED Driver

Construction Material : Aluminium Die Cast
Body Colour : Black



24V LED Driver
40 Months Warranty

Finish Type :
Powder Coated

Wattages
60W | 100W | 200W
300W | 400W

Ampere
2.5Amp | 4.15Amp | 8.3Amp
12.5Amp | 16.5Amp





TESLA

LED Driver

Construction Material : Aluminium Die Cast
Body Colour : Black

Wattages
24W | 60W | 100W | 120W
150W | 200W | 240W | 300W

Ampere
2Amp | 5Amp | 8.3Amp
10Amp | 12.5Amp | 16.7Amp
20Amp | 25Amp

12V LED Driver

Finish Type :
Powder Coated

TESLA+

LED Driver

Construction Material : Polycarbonate
Body Colour : White







Wattages
8 - 24W Single Pin
8 - 24W Double Pin

Buring Hours
50,000

Compatible
Panel Lights

IP Rating
IP20

10.

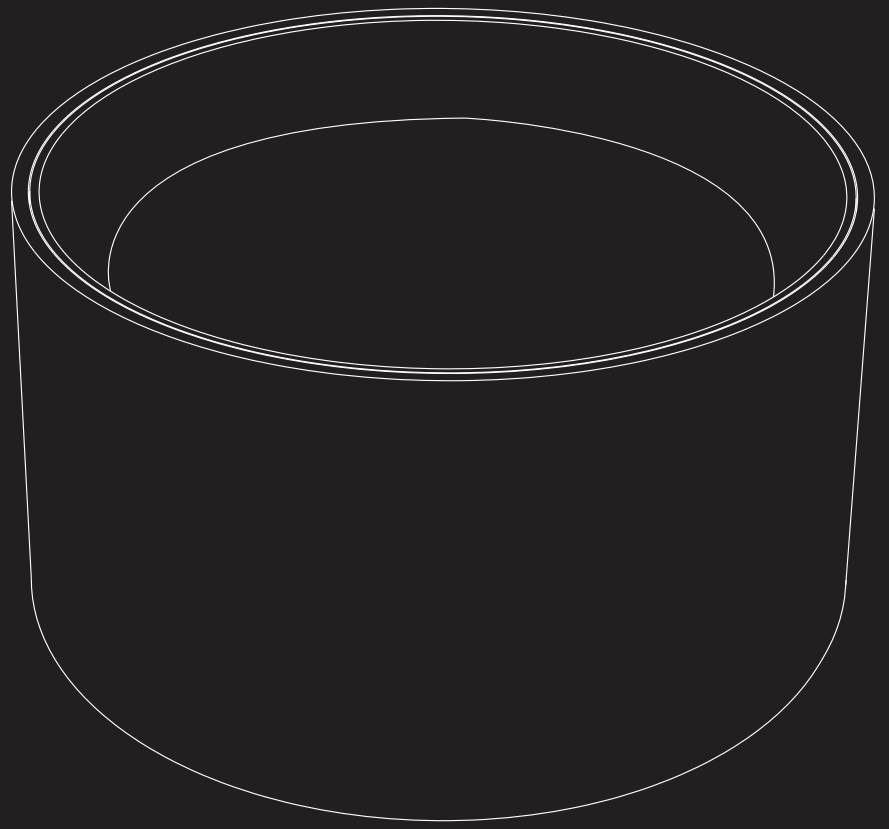

SURFACE PANEL

INARA

Surface Panel Light



Construction Material : Polycarbonate
Body Colour : Black & White

Light Colours :

WW + (WW NW CW)

WW + (PK B P)

Shapes : **Round**

Reflector : **Black, White & Rose Gold**

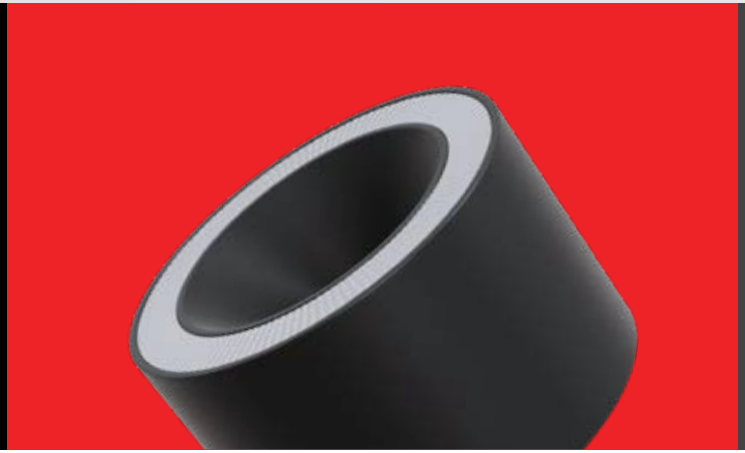

Beam Angle
24 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

Led Chip
Bridgelux

Wattages
8+8W

Dimensions (mm)
80

Height (mm)
**







Wattages
12W | 18W | 24W

Dimensions (mm)
92, 122, 142

Height (mm)
75, 75, 75

Beam Angle 120 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Bridgelux	**Dimmable & Tuneable** 2.4G Remote & App Control

EMAYA

Surface Panel Light

Construction Material : Aluminium Die Cast
Body Colour : Black

Light Colours :

3CCT Switch : WW NW CW

2.4G (Dimmable & Tuneable)

Shapes : **Round**

Reflector : **Gun Black, Rose Gold & Matt Black**



KRSNA

Surface Panel Light

Construction Material : Polycarbonate
Body Colour : Black & White

Wattages
5W | 10W | 15W

Dimensions (mm)
61, 95, 130

Light Colours :

WW NW CW

Red Green Blue

Pink

3 in 1 (WW, NW, CW)

3 in 1 (PK, G, B)

Shapes : Round & Square

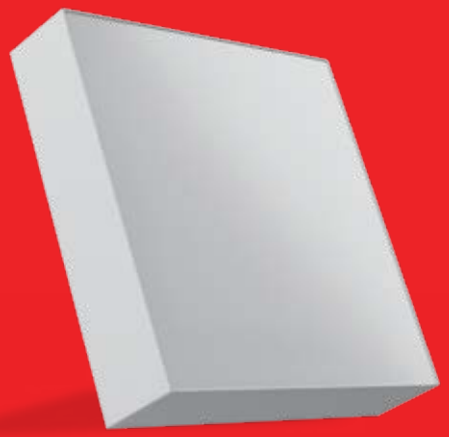



Beam Angle 120 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Bridgelux	Switch Tuneable Yes







SUPERIA

Surface Panel Light

Construction Material : Aluminium Die Cast
Body Colour : White

Wattages
8W | 15W | 22W

Dimensions (mm)
110, 156, 203

Height (mm)
26, 26, 26

Beam Angle 120 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Epistar	Switch Tuneable Yes

Light Colours :

WW NW CW

Red Green Blue

3 in 1 (WW, NW, CW)

Shapes : Round & Square



PRIVIA+

Surface Panel Light

Construction Material : Aluminium Die Cast
Body Colour : White

Wattages
3W + 3W | 6W + 3W | 12W + 4W

Dimensions (mm)
104, 150, 190

Heights (mm)
25, 25, 25

Light Colours

CW+ (WW, G,PK,RGB, B)

Shapes : Round & Square





Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

11.

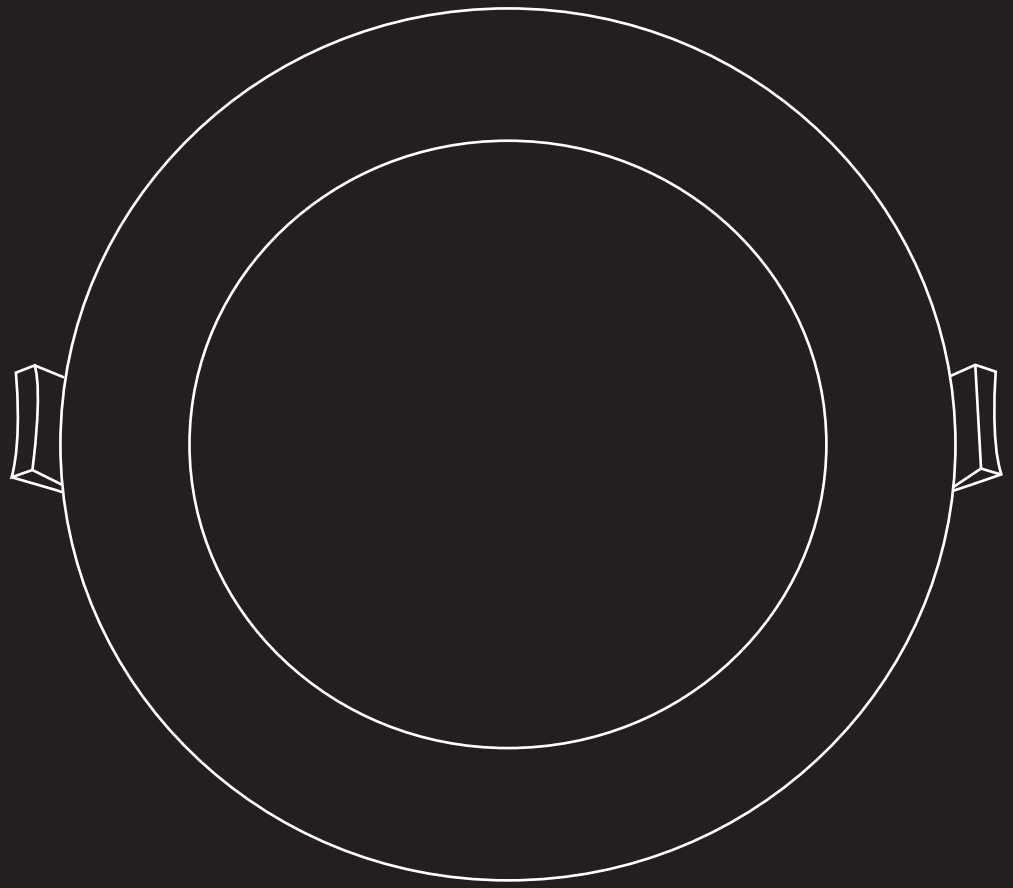

PANEL LIGHT



Light Colours :

WW

NW

CW

Shapes : Round & Square

Wattages
8W | 12W | 15W
18W | 22W

Dimensions (mm)
118, 145, 170, 190, 223

Cutouts (mm)
99, 127, 152, 178, 211

Height (mm)
20, 20, 20





THEAA

Panel Light

Construction Material : Aluminium Die Cast

Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

PRESA

Panel Light

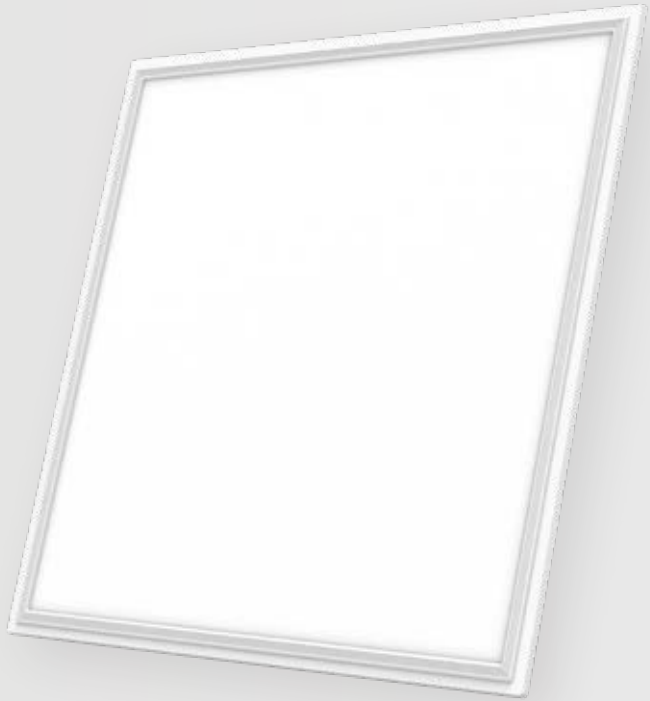

Construction Material : ABS Frame & PS Diffuser
Body Colour : White

Light Colours :

NW

CW

Shapes : Square

Beam Angle 120 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 4 kV	IP Rating IP20
Led Chip Epistar	





Wattages
42W

Dimensions (mm)
610 X 610



KIARA

Panel Light

Construction Material : Aluminium Die Cast
Body Colour : White

Light Colours :

WW

NW

CW

Shapes : **Round & Square**

Wattages
8W | 12W | 15W
18W | 22W

Dimensions (mm)
118, 145, 170, 190, 223

Cutouts (mm)
99, 127, 152, 178, 211

Height (mm)
20, 20, 20

Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar





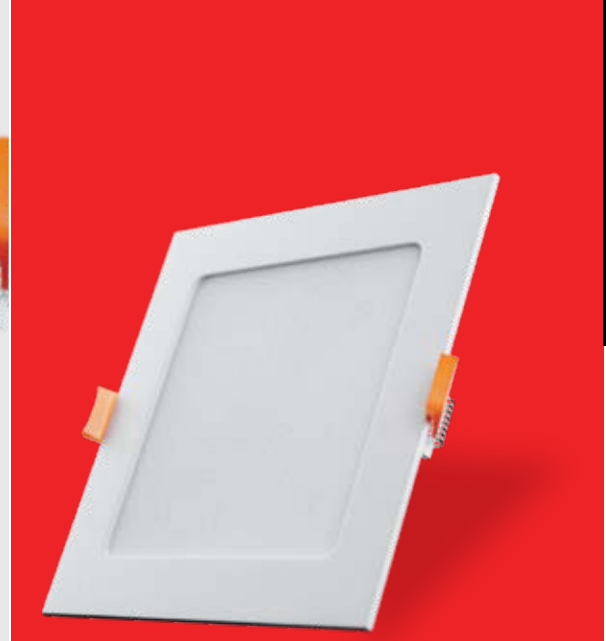



LUMIA

Panel Light

Construction Material : Aluminium Die Cast
Body Colour : White

Light Colours :

3 in 1 (WW, NW, CW)

Shapes : Round & Square

Wattages
6W | 12W

Dimensions (mm)
118, 168

Cutouts (mm)
99, 152

Height (mm)
20, 20

Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



NEXIA

Panel Light

Construction Material : Polycarbonate
Body Colour : White

Wattages
3W | 6W | 12W | 18W

Dimensions (mm)
74, 99, 152, 203

Cutouts (mm)
65, 100, 150, 200

Heights (mm)
11, 11, 11, 11

Light Colours :

WW NW CW

Red Green Blue

Shapes : **Round & Square**





Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

MASSA

Panel Light

Construction Material : Aluminium Die Cast
Body Colour : White



Light Colours :

WW NW CW

Shapes : Round & Square



Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

Wattages
6W | 12W

Dimensions (mm)
120, 170

Cutouts (mm)
99, 157

Heights (mm)
20, 20



TAARA

Panel light

Construction Material : Polycarbonate

Wattages
6W + 6W

Dimensions (mm)
140

Cutouts (mm)
110

Height (mm)
13

Light Colours :

CW+PGB

Shapes : **Round**



Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar







PRIVIA

Panel Light

Construction Material : Aluminium Die Cast
Body Colour : White

Wattages
3W + 3W | 6W + 3W | 12W + 4W

Dimensions (mm)
112, 140, 170

Cutouts (mm)
63, 101, 140

Height (mm)
13, 13, 13

Beam Angle 180 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 2.5 kV	IP Rating IP20
Led Chip Epistar	

Light Colours

CW+ (WW, G, PK, RGB, B)

Shapes : **Round & Square**

12.

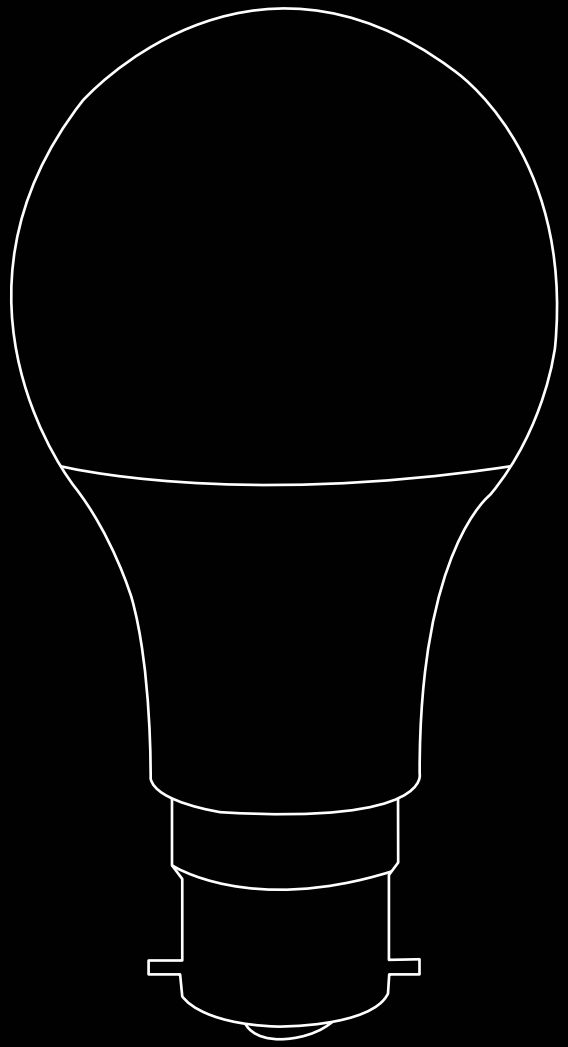

BULB AND INVERTER BULB

DISHA

LED Bulb



Construction Material : Polycarbonate
Body Colour : White



Light Colours :

CW

Wattages
5W | 7W | 9W | 12W | 15W | 20W | 30W | 40W | 50W

IP Rating
IP20

Mounting Type
B22

Surge Protection
2.5 kV

FABIA

LED Bulb

Construction Material : Polycarbonate
Body Colour : White



Light Colours :

CW

Wattages
15W

Backup
Upto 12 hrs





Battery Capacity
2200 Mah

IP Rating
IP20

DIMMABLE
3 STEP

FIONA

LED Bulb

Construction Material : Polycarbonate







Light Colours :

CW

Wattages
9W

IP Rating
IP20

Surge Protection
2.5 kV

Mounting Type
B22

13.

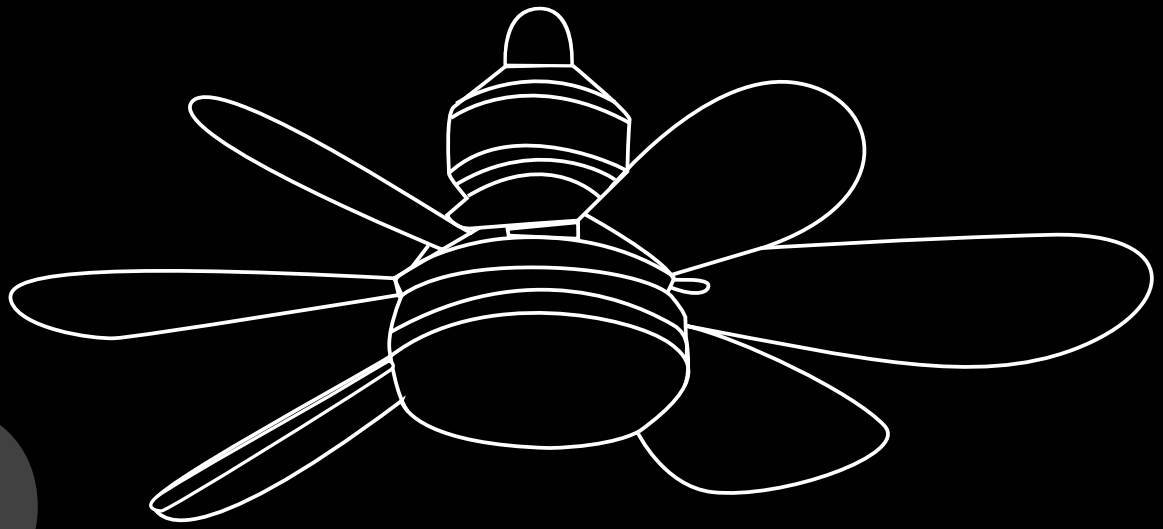

LED FAN LIGHT

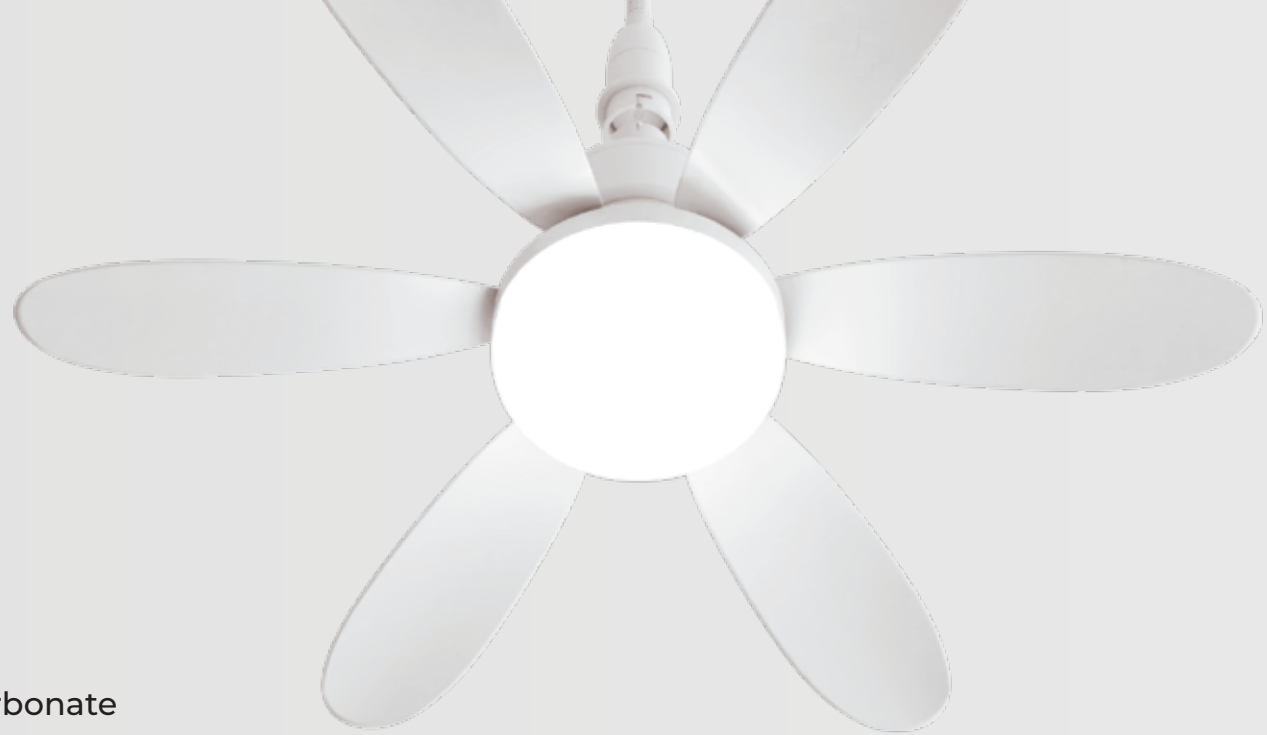

PARAMA

LED Fan Light

Construction Material : Aluminium Die Cast & Polycarbonate
Body Colour : White

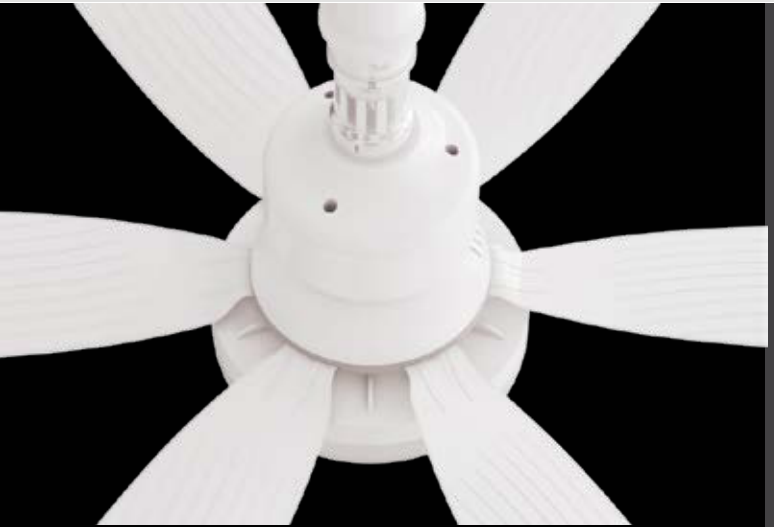

Light Colours :
3 in 1 (WW, NW, CW)

Lumens/Watt
100 Lm/w

Dimmable & Tuneable
2.4G Remote & App Control



Wattages
40W

Dimensions (mm)
520

Heights (mm)
185

14.

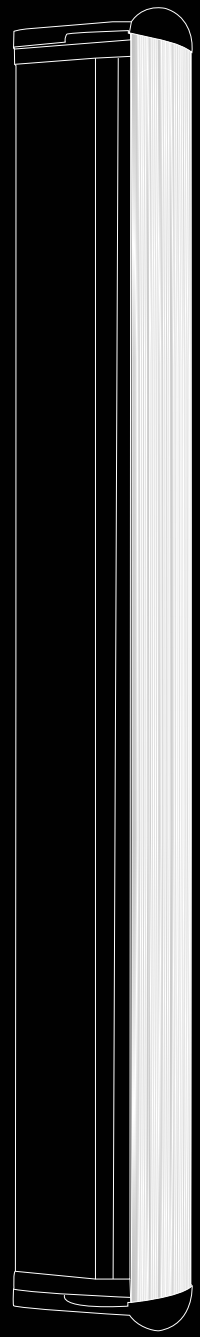

MIRROR LIGHT



Light Colours :

WW NW CW

3 in 1 (WW, NW, CW)

Wattages
10W | 14W | 18W

Length (mm)
310, 410, 546

Wide (mm)
34, 34, 34

Height (mm)
65, 65, 65

SUPRA

LED Mirror Lights

Construction Material : Aluminium Die Cast
Body Colour : Grey

PF 0.9 PF	CRI > 90
Surge Protection 2.5 kV	Lumens/Watt 110 Lm/w
Led Chip Bridgelux	IP Rating IP20
Tiltable Yes	Switch Tuneable Yes





15.

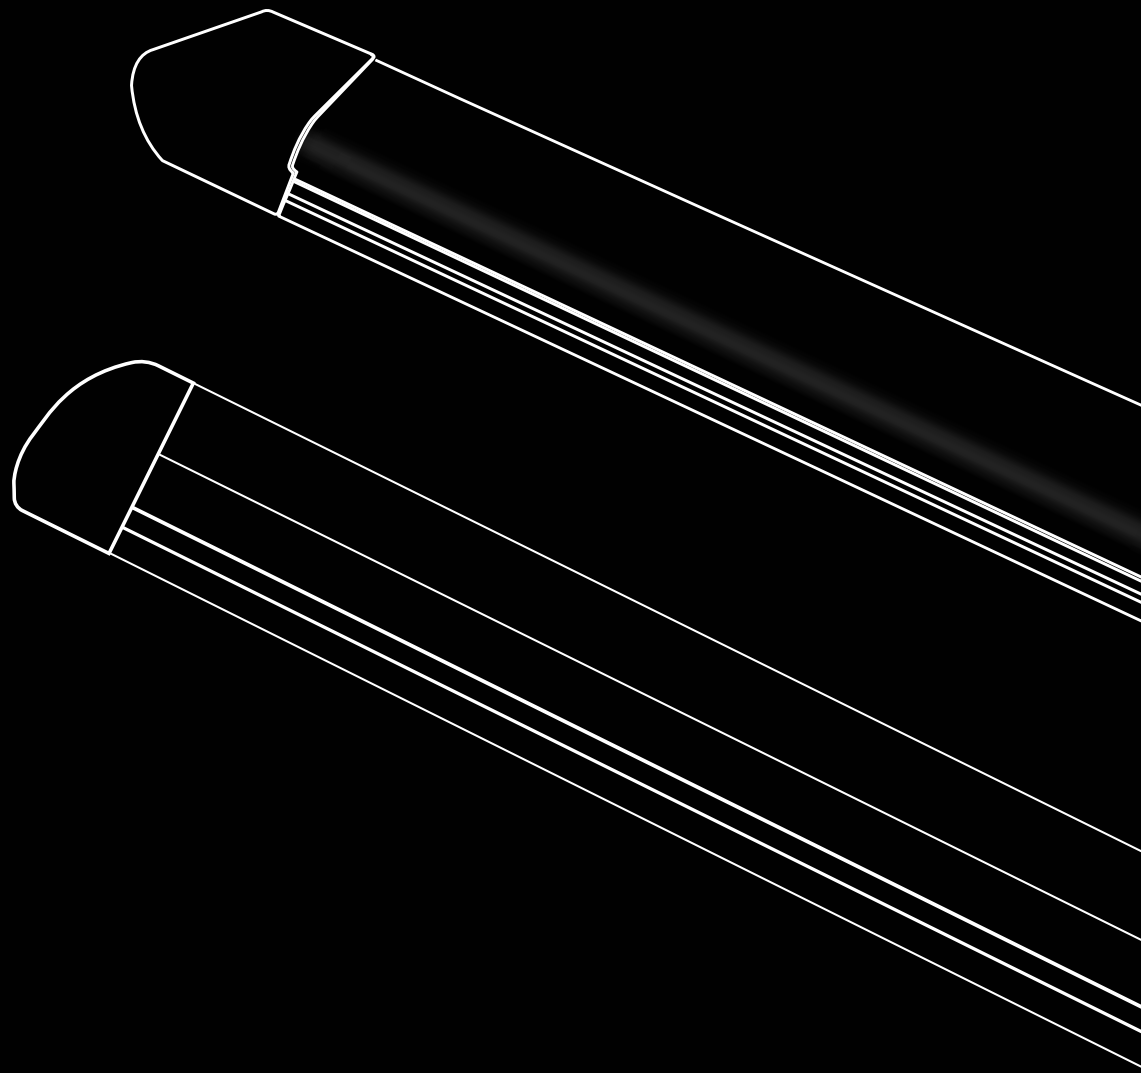

BATTEN LIGHT



ESSENZA

Batten Lights

Construction Material : Polycarbonate & Aluminium Die Cast
Body Colour : White

Wattages I Size (ft)
20W | 36W | 52W | 55W | 72W | 100W
4FT

Length (mm)
1140, 1200, 1200, 1200, 1200, 1200, 1200

Wide (mm)
24, 24, 24, 29, 44, 75, 100

Heights (mm)
24, 24, 24, 34, 28, 27, 26

Light Colours :

WW NW CW

3CCT Switch (WW, NW, CW)



Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar







ESSENZA+

Batten Light

Construction Material : Polycarbonate
Body Colour : White

Wattages
8W | 12W | 20W | 24W | 40W
1FT | 2FT | 4FT

Dimensions (mm)
305, 609, 1219, 1219, 1219

Beam Angle 180 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Epistar	

Light Colours :

WW

NW

CW



VISTA

Batten Light

Construction Material : Polycarbonate
Body Colour : White

Beam Angle 120 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Epistar	

Wattages
36W

Dimensions (mm)
1140

Light Colours :

- WW
- NW
- CW



JAFFA

Batten Light



Construction Material : Polycarbonate
Body Colour: White

Light Colours :

CW

Sensor Controlled



Beam Angle 120 Degree	**CRI** > 90
PF 0.9 PF	**Lumens/Watt** 110 Lm/w
Surge Protection 2.5 kV	**IP Rating** IP20
Led Chip Epsitar	

Wattages I Size
24W

Length (mm)
1140

Wide(mm)
25

Heights (mm)
28



NEBULA

Batten Light

Construction Material : Polycarbonate & Aluminium Die Cast
Body Colour : Black

Wattages I Size (ft)
14W | 28W
2FT | 4FT

Length (mm)
609, 1219

Wide (mm)
26, 26

Heights (mm)
29, 29

Light Colours :
3 in 1 (WW, NW, CW)



PF 0.9 PF	CRI > 90
Surge Protection 2.5 kV	Lumens/Watt 110 Lm/w
Led Chip Bridgelux	IP Rating IP20
Tiltable Yes	Switch Tuneable Yes

16.

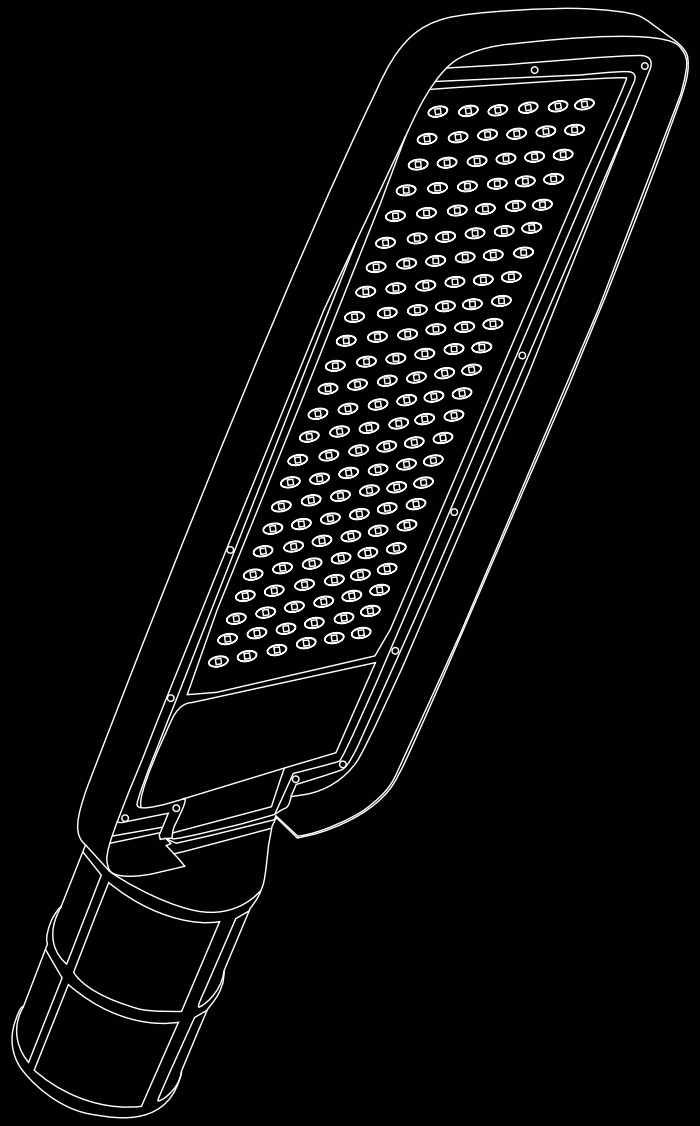

OUTDOOR LIGHT



Light Colours :

3CCT Switch : WW NW CW



Wattages
50W
100W
200W

Dimensions L X W X H (mm)
190 X 130 X 25
239 X 163 X 25
370 X 241 X 25



ESHAA

LED Flood Lights

Construction Material : Aluminium Die Cast + Glass
Body Colour : Black

Beam Angle 120 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 4 kV, 6 kV, 6 kV	IP Rating IP66



OSAKA

LED Flood Light

Construction Material : Aluminum Die Cast + Glass
Body Colour : Grey





Light Colours :

WW CW RGB

Wattages
30W | 50W | 100W | 150W | 200W | 300W

Dimensions (mm)
245 X 160 X 30mm
280 X 180 X 30mm
355 X 240 X 30mm
357 X 350 X 36mm
357 X 350 X 36mm
420 X 375 X 36mm

Beam Angle 120 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 3 kV, 4 kV, 6 kV	IP Rating IP66

ZENIA

LED Flood Light

Construction Material : Aluminum Die Cast + Glass
Body Colour : Black



Light Colours :

WW CW

Pink Green Blue

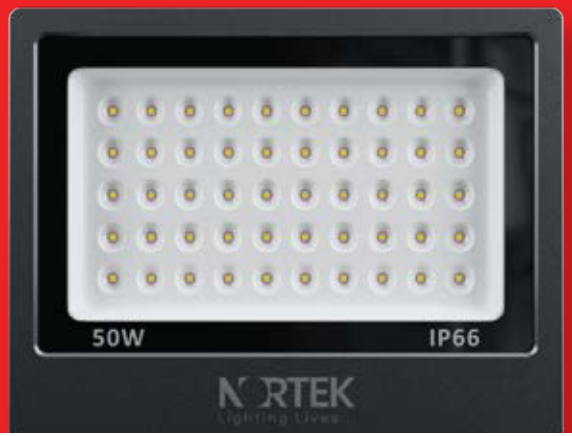

PF
0.9 PF

CRI
> 90

Surge Protection
4 kV, 6 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66

Wattages
10W | 150W | 300W



TESSA

LED Street Light

Construction Material : Aluminium Die Cast
Body Colour : Grey



Light Colours :

CW

Wattages
24W | 36W
50W | 100W

Beam Angle 24 Degree	**CRI** > 90	**Led Chip** Bridgelux
PF 0.9 PF	**Lumens/Watt** 110 Lm/w	
Surge Protection 2.5 kV	**IP Rating** IP66	







QUBAA

LED Street Light

Construction Material : Aluminium Die Cast
Body Colour : Grey

Wattages
30W | 50W
72W | 100W
150W | 200W

PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

Led Chip
Seoul

IP Rating
IP66

Light Colours :

CW

XRBIA

LED Street Light

Construction Material : Aluminum Die Cast
Body Colour : Grey



Wattages
20W | 30W
36W | 50W
72W | 100W

Light Colours :

WW

NW

CW



PF
0.9 PF

CRI
> 90

Surge Protection
4 kV, 6 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66

RIVERIA

LED Street Light



Construction Material : Aluminium Die Cast + Glass
Body Colour : Black

Light Colours :

CW



PF
0.9 PF

CRI
> 90

Surge Protection
4 kV, 6 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66

Wattages
20W (12V) | 45W (24V)

17.

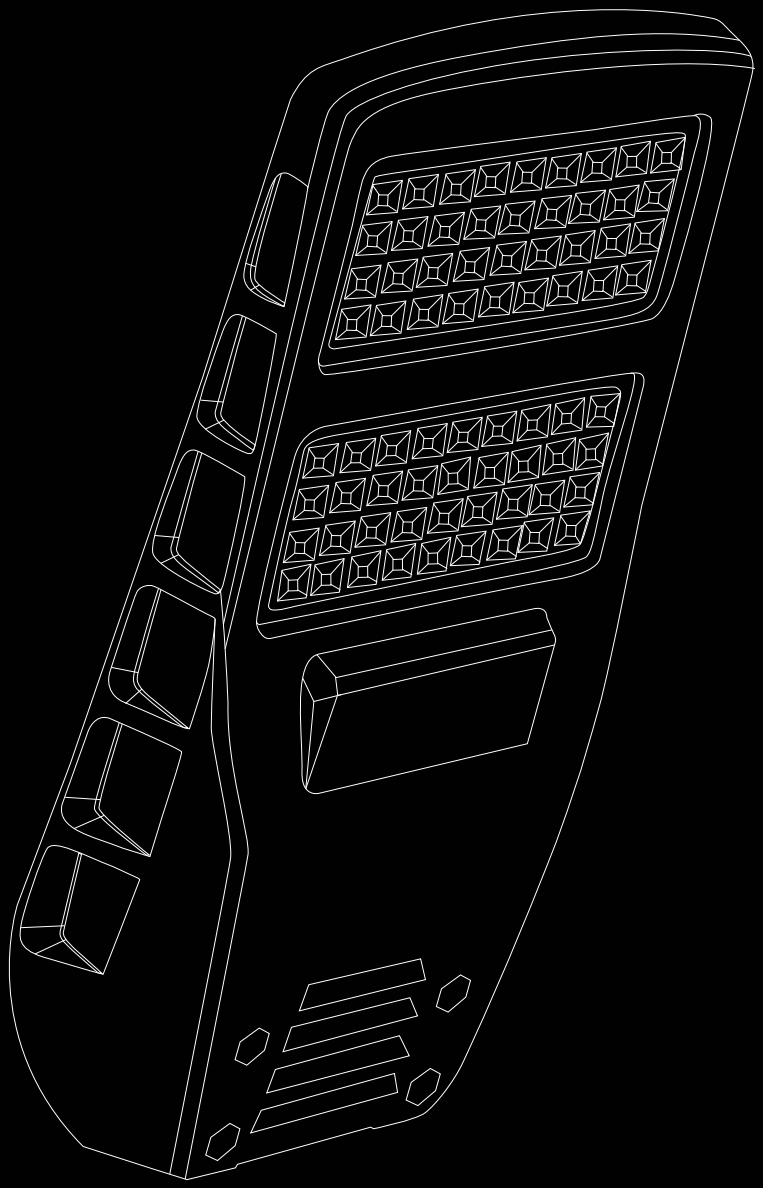

SOLAR LIGHT



STELA

Solar Light

Construction Material : ABS
Body Colour : Black





Wattages
40W | 80W

Power Source
Solar

Charge Time
4 - 6 Hrs

Sensor
PIR + Intelligent

Discharge Time
10 - 12 Hrs

IP Rating
IP66

Light Colours :

CW

Battery

3.2V/16.5 AH/3 Batteries

3.2V/22 AH/ 6 Batteries

STELA+

Solar Light

Construction Material : ABS
Body Colour : Black



Light Colours :

CW

Battery
3.2V/18AH (3PCS X 6AH)
3.2V/24AH (4PCS X 6AH)
3.2V/30AH (5PCS X 6AH)



Beam Angle
90 Degree

Charge Time
6 - 9 Hrs

Power Source
Solar

Working Hrs
1 - 2 Days

Sensor
Radar

IP Rating
IP66

Wattage	40W	60W	80W
Lumens	3000/lm	4000/lm	5000/lm

KEA

Solar Light

Construction Material : ABS+PC+GLASS+COPPER
Body Colour : Black





Light Colours :
WW

Battery
18650 2000mAH
Solar Panel
Monocrystal 5V/1.5W

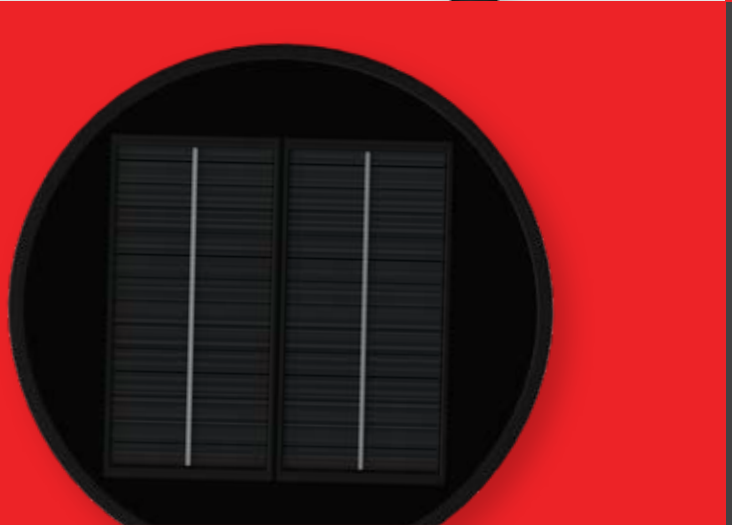

Power Source
Solar

Charge Time
4 - 6 Hrs

Sensor
PIR + Intelligent

Discharge Time
10 - 12 Hrs

IP Rating
IP66

Light - Sensing Switch
Yes

LED
COB 2200K

Wattages
12W



KIAORA

Solar Light

Construction Material : ABS+PC+GLASS+COPPER
Body Colour : Black



Light Colours :
WW

Battery
18650 1500mAH
Solar Panel
Monocrystal 5V/1.5W

Wattages
9W

Power Source
Solar

Charge Time
4 - 6 Hrs

Sensor
PIR + Intelligent

Discharge Time
10 - 12 Hrs

IP Rating
IP66

Light - Sensing Switch
Yes

LED
COB 2700K

18.

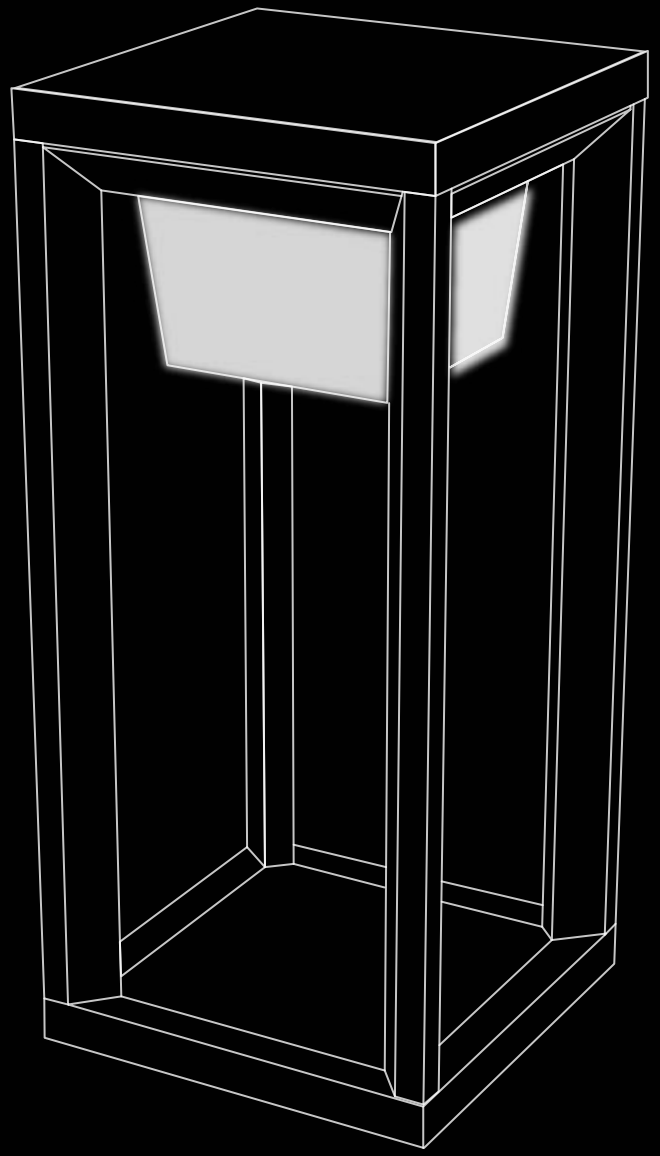

BOLLARD LIGHT



SIARA

Bollard Light

Construction Material : Aluminium Die Cast
Body Colour : Black



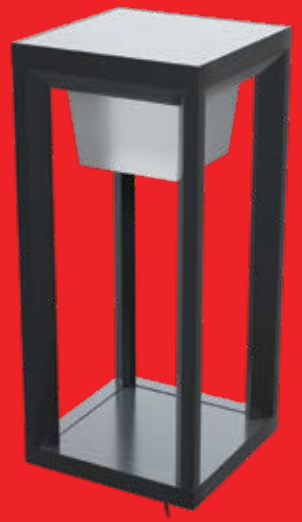

Light Colours :

WW

Wattages
12W

Dimensions (mm)
140 X 140
140 X 140
140 X 140

Heights (mm)
300
650
800

PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66

JARIVA

Bollard Light

Construction Material : Aluminium Die Cast
Body Colour : Grey



Light Colours :

WW

Wattages
12W

Dimensions (mm)
160 X 54
160 X 54

Heights (mm)
600
800





PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66

SIARA+

Bollard Light

Construction Material : Aluminium Die Cast
Body Colour : Black



Light Colours :

WW

Wattages
12W

Dimensions (mm)
140 X 140

Heights (mm)
230





PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66

MAMBA

Bollard Light

Construction Material : Aluminium Die Cast
Body Colour : Grey



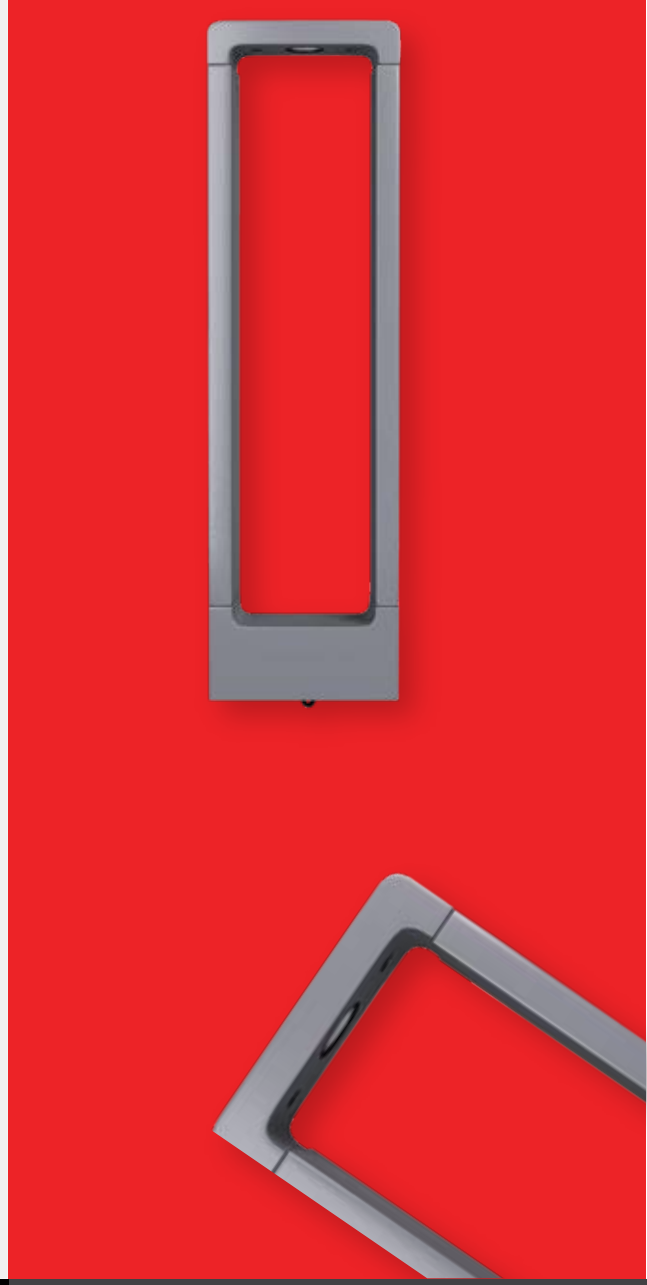

Wattages
12W

Dimensions (mm)
160 X 54
160 X 54
160 X 54

Heights (mm)
250
600
800

Light Colours :

WW

PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66



TRESA

LED Gate Lamp

Construction Material : Aluminium Die Cast
Body Colour : Black

Light Colours :

WW

Wattages
E-27

Dimensions LXH (mm)
170 X 170
230 X 230

Height (mm)
210
240

PF
0.9 PF

Surge Protection
2.5 kV

IP Rating
IP66

Lumens/Watt
110 Lm/w





KYMAA

Bollard Light

Construction Material : Aluminium Die Cast
Body Colour : Black





Light Colours :

WW

Wattages
8W

Base (mm)
94

Heights (mm)
600

PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

Led Chip
Bridgelux

IP Rating
IP66

19.

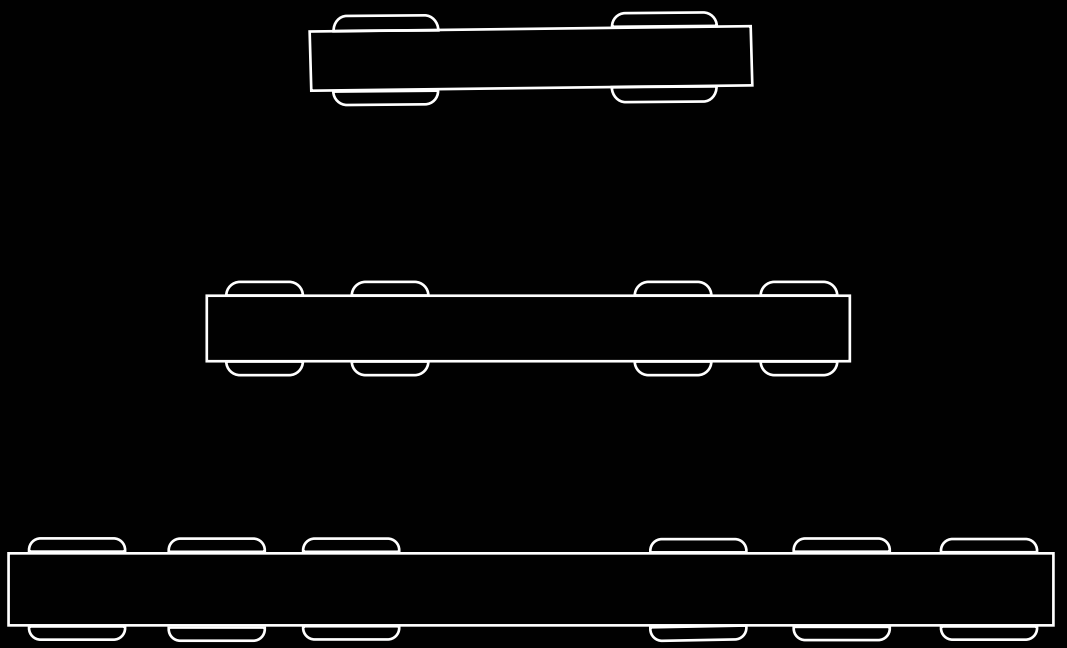

WALL LIGHT







LIMCA

Wall Light

Construction Material : Aluminium Die Cast
Body Colour : Black

Wattages
10W | 20W

Dimensions (Feet)
1, 2

Light Colours :

WW

PF
0.9 PF

Surge Protection
2.5 kV

Led Chip
CREE

IP Rating
IP66

Lumens/Watt
110 Lm/w

CRI
> 90

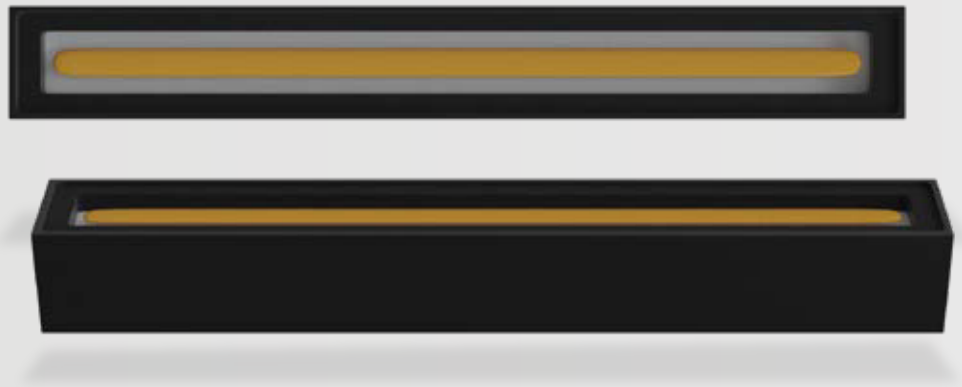

PF
0.9 PF

Surge Protection
2.5 kV

Led
COB Strip

IP Rating
IP66

Lumens/Watt
110 Lm/w

CRI
> 90

HANNA

Wall Light

Construction Material : Aluminum Die Cast + Glass
Body Colour : Black

Light Colours :

WW

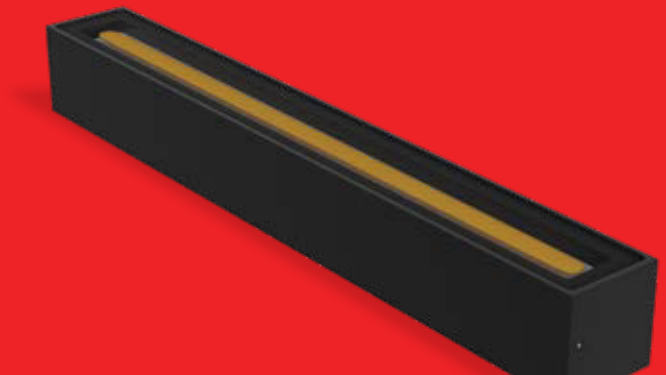

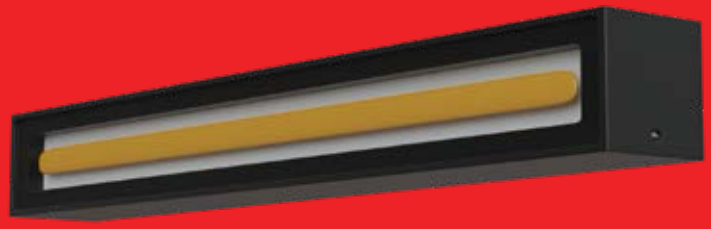

Wattages
6W | 10W



Light Colours :

WW

Wattages
4W | 8W | 12W

Dimensions LXH (mm)
95 X 20
200 X 20
290 X 20

Height (mm)
35, 35, 35

PF
0.9 PF

Surge Protection
2.5 kV

Led Chip
CREE

IP Rating
IP66

Lumens/Watt
110 Lm/w

CRI
> 90

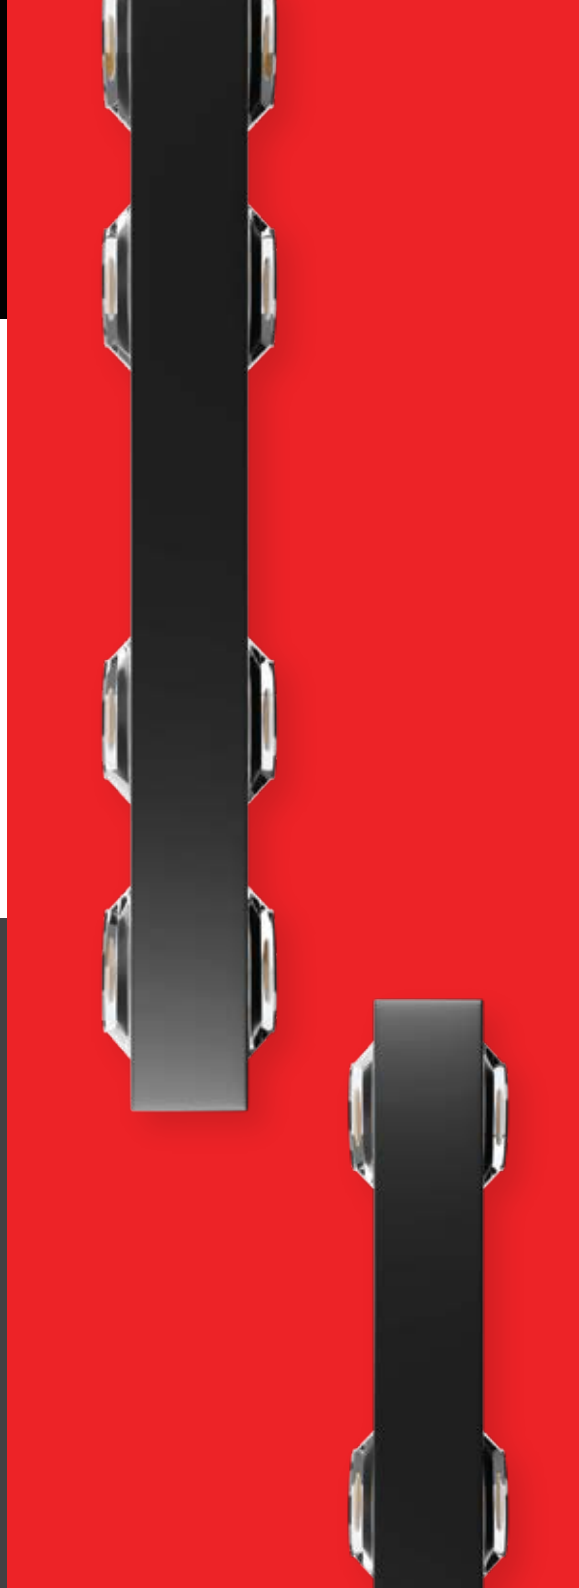

KAAMA

Wall Light

Construction Material : Aluminium Die Cast
Body Colour : Black



SHIKA

Wall Light

Construction Material : Aluminium Die Cast
Body Colour : Grey & White

Wattages
1W | 2W

Dimensions (mm)
35, 35

Heights (mm)
50, 35

Light Colours :

WW



PF
0.9 PF

Surge Protection
2.5 kV

Led Chip
CREE

IP Rating
IP66

Lumens/Watt
110 Lm/w

CRI
> 90



Light Colours :

WW

Wattages
2W | 3W | 4W

Dimensions (mm)
70, 49, 30

Height (mm)
25, 30, 50



PF
0.9 PF

Surge Protection
2.5 kV

Led Chip
CREE

IP Rating
IP66

Lumens/Watt
110 Lm/w

CRI
> 90

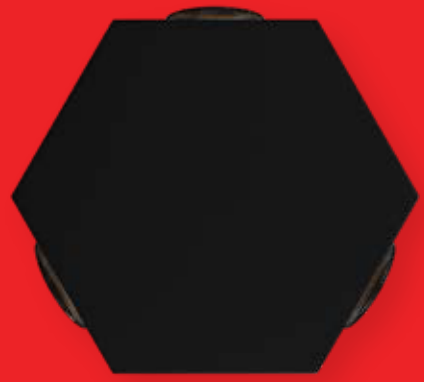

COREA

Wall Light

Construction Material : Aluminium Die Cast
Body Colour : Grey



DONNA

Wall Light

Construction Material : Ceramic
Body Colour : Golden

Wattages
12W

Dimensions (mm)
155

Heights (mm)
20

Cutouts (mm)
82

Light Colours :

WW



PF
0.9 PF

Surge Protection
2.5 kV

Led Chip
CREE

IP Rating
IP66

Lumens/Watt
110 Lm/w

CRI
> 90

VENEZIA

Wall Light

Construction Material : Polycarbonate
Body Colour : White



Light Colours :

WW



Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP66

Led Chip
Epistar

Wattages I Size
8W | 10W | 20W

Length (mm)
168, 171, 212

Wide(mm)
68, 70, 100

Heights (mm)
45, 49, 60

VENEZIA+

Wall Light

Construction Material : Aluminium Die Cast
Body Colour : Grey



Light Colours :

WW



PF
0.9 PF

Surge Protection
2.5 kV

Led Chip
CREE

IP Rating
IP66

Lumens/Watt
110 Lm/w

CRI
> 90

Wattages
2W | 4W

Dimensions (mm)
20, 40

Heights (mm)
40, 50

20.

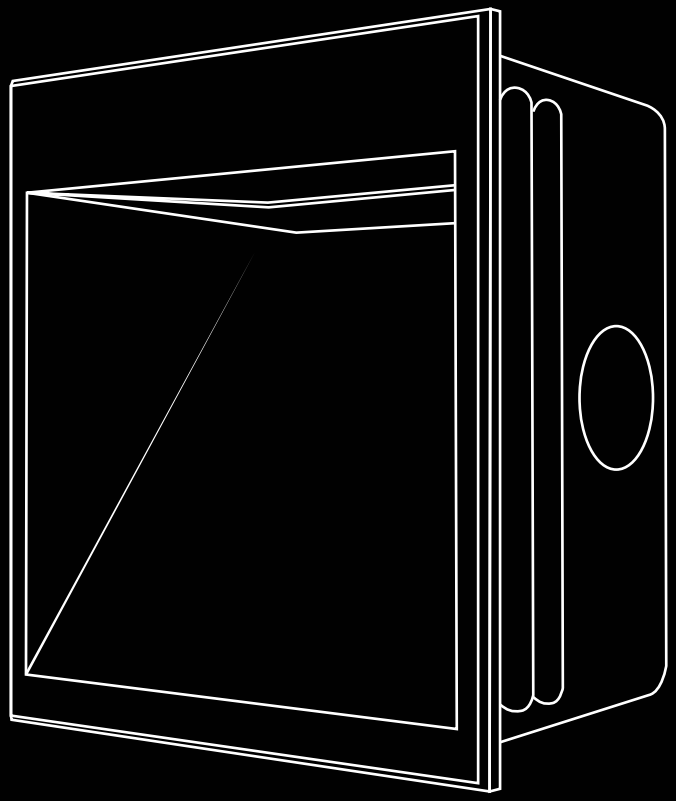

LED FOOT LIGHT



ORINA

LED Foot Light

Construction Material : Aluminium Die Cast
Body Colour : White & Black

Wattages
3W

Dimensions (mm)
85 X 85

Height (mm)
51

Light Colours :

WW



PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

Led Chip
Epistar

IP Rating
IP66



SENSA

LED Foot Light

Construction Material : Aluminium Die Cast
Body Colour : Black





Wattages
3W

Dimensions L X W (mm)
45 X 45

Height (mm)
50

PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

Led Chip
Epistar

IP Rating
IP66

Light Colours :

WW

21.

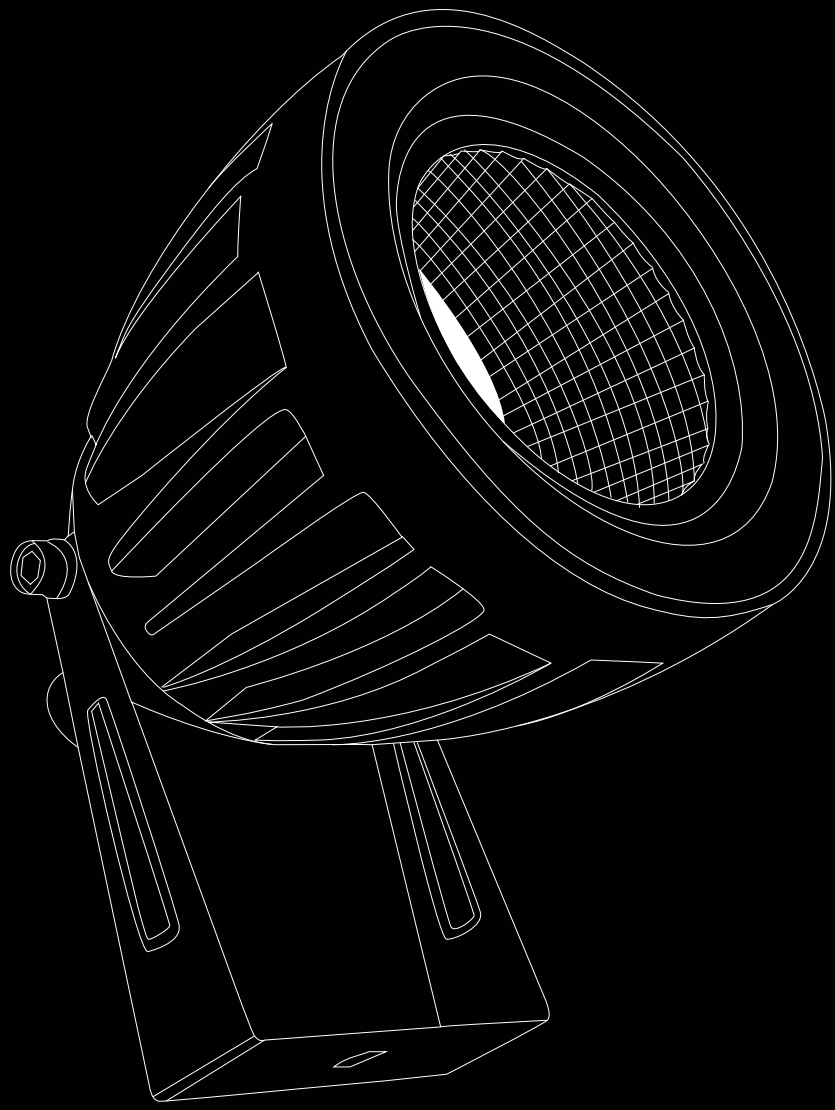

GARDEN LIGHT

SHANAYA

Garden Light

Construction Material : Aluminium Die Cast
Body Colour : Black

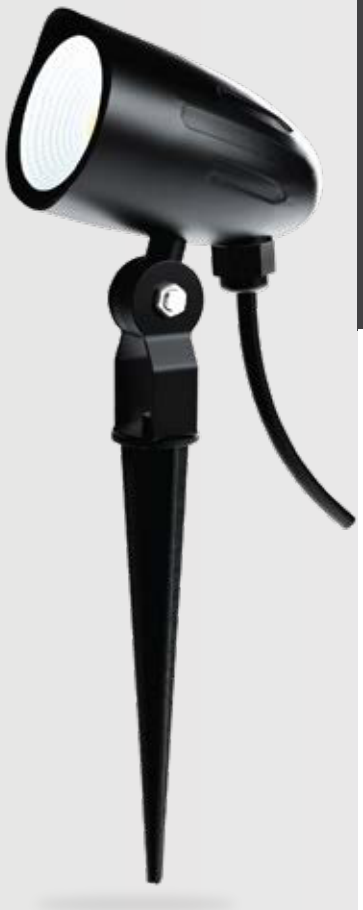

Light Colours :

WW

Green

t Round

Wattages
7W | 12W

Dimensions (mm)
62

Heights (mm)
100





PF
0.9 PF

CRI
> 9t0

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66



Light Colours :

WW NW CW

Red Green Blue

Pink Amber IB



Wattages
5W | 12W

Dimensions (mm)
75, 75



HYDRA

Garden light

Construction Material : Aluminium Die Cast
Body Colour : Black

PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66



FEISTA

Garden Light

Construction Material : Aluminium Die Cast
Body Colour : Black





Light Colours :

RGB

Wattages
12W

Dimensions (mm)
60

Heights (mm)
80

PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66

22.

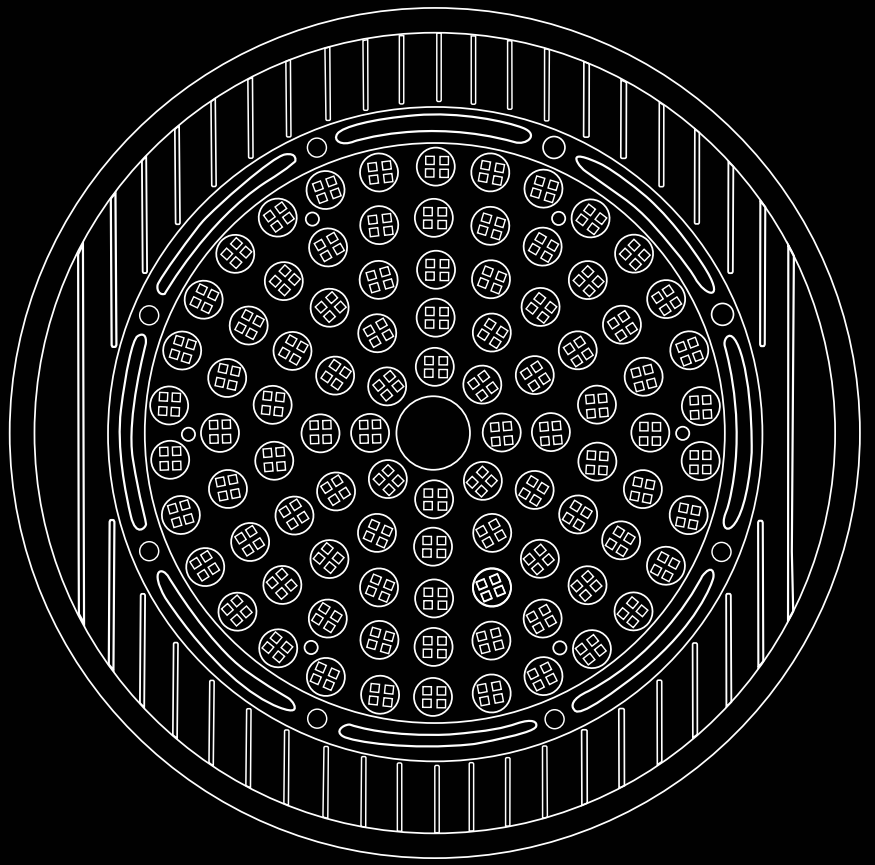

HI-BAY LIGHT

SIGMA

High Bay Light



Construction Material : Aluminium Die Cast
Body Colour : Black

Light Colours :

CW



PF
0.9 PF

CRI
> 90

Surge Protection
4 kV, 6 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66

Wattages
150W | 200W

QUORA

LED HI-BAY LIGHT



Construction Material : Aluminium Die Cast
Body Colour : Grey

Wattages
100W
150W
200W
300W

Beam Angle 90 Degree	CRI > 90
PF 0.9 PF	Lumens/Watt 110 Lm/w
Surge Protection 6 kV	IP Rating IP66





Light Colours :

CW

23.0

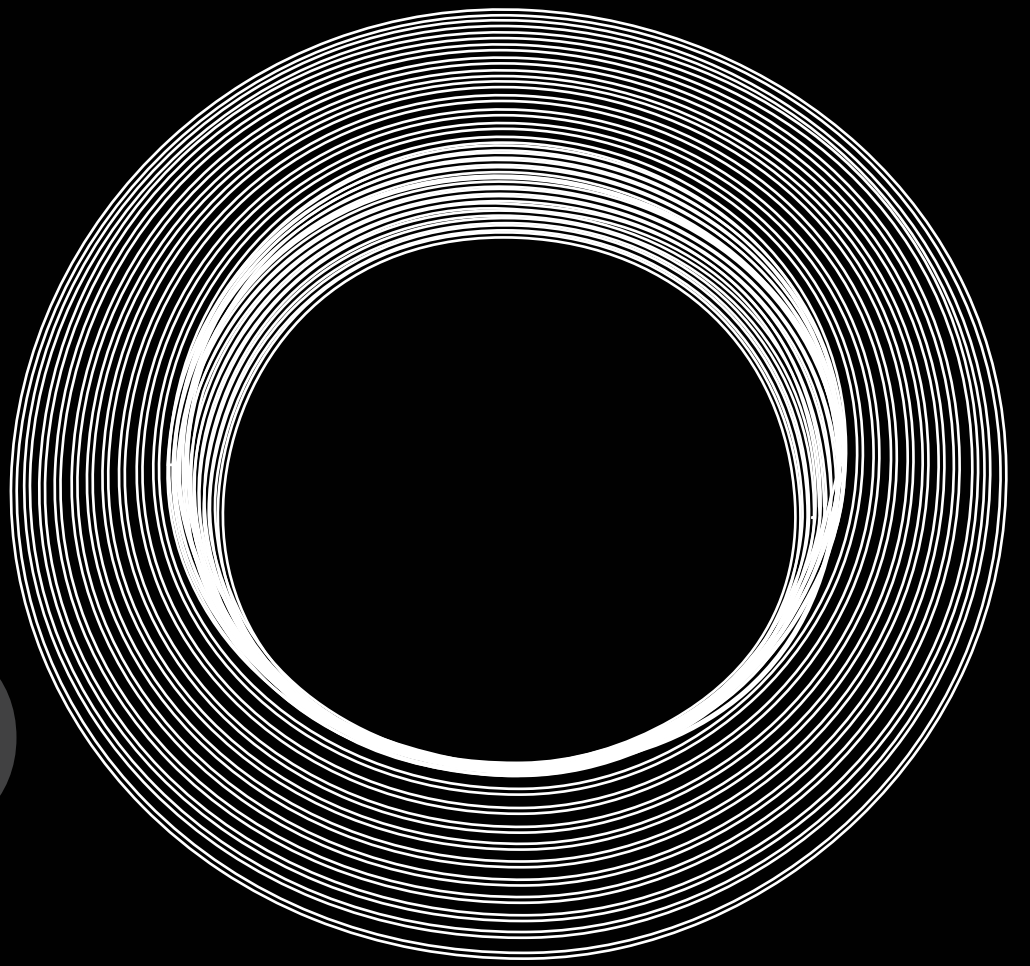

WIRES & CABLES



SAMARA

Wires and Cables

Material : Copper
Grade : 99.97% Hi Purity Electrolytic Grade Copper
Wire Length : 90 MTR, 200MTR & 300 MTR



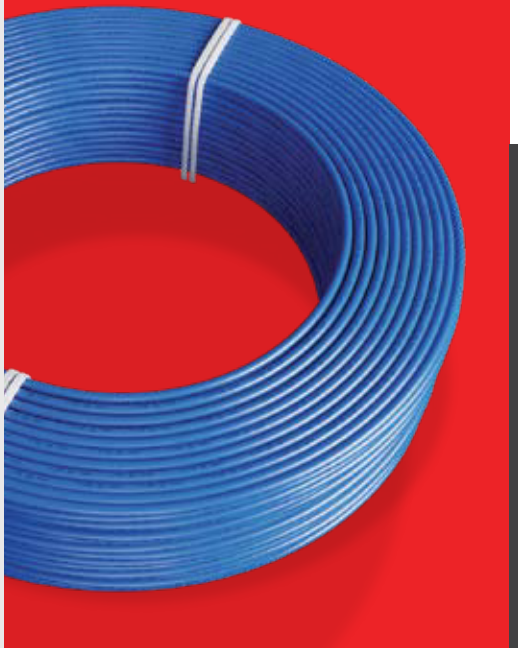

Colours :

Red Green Blue

Y BL Gry W

Sizes
0.75 sq mm | 1.00 sq mm | 1.50 sq mm | 2.50 sq mm | 4.00 sq mm | 6.00 sq mm | 10 sq mm

Nominal Area of Conductor
1

Leakage Current
0.009 AMPS

Type
FR-LSH-LF

Voltage
1100V

Core
Single

Class
5

PVC Coating
Double Layer Protection

Compliance
ROHS & Reach Compliant



Sizes
0.75 sq mm | 1.00 sq mm | 1.50 sq mm | 2.50 sq mm | 4.00 sq mm | 6.00 sq mm | 10 sq mm

Nominal Area of Conductor
1

Leakage Current
0.009 AMPS

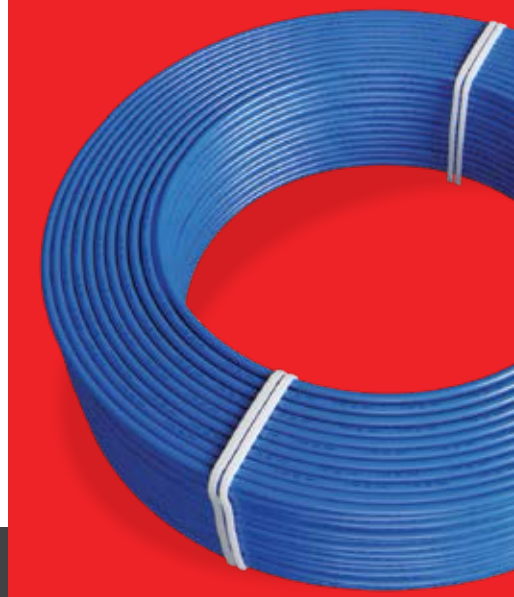

Type
HR-FR-LSH-LF

Voltage
1100V

Core
Single

Class
2

PVC Coating
Triple Layer Protection

Compliance
ROHS & Reach Compliant



VAAYA

Wires and Cables

Material : Copper
Grade : 99.97% Hi Purity Electrolytic Grade Copper
Wire Length : 90 MTR & 300 MTR

Colours :

Red Green Blue

Y BL Gry W



Colour :

Black



Sizes

0.75 Sq mm (2C, 3C, 4C)

1.0 Sq mm (2C, 3C, 4C)

1.5 Sq mm (2C, 3C, 4C)

2.5 Sq mm (2C, 3C, 4C)

4 Sq mm (2C, 3C, 4C)

6 Sq mm (2C, 3C, 4C)

RASHA

Wires and Cables

Material : Copper
Grade : 99.97% Hi Purity Electrolytic Grade Copper
Cable Length : 100 MTR

Type
FR-LSH-LF

Voltage
1100V

Class
5

Core
Multi

PVC Coating
Triple Layer Protection

Compliance
ROHS & Reach Compliant

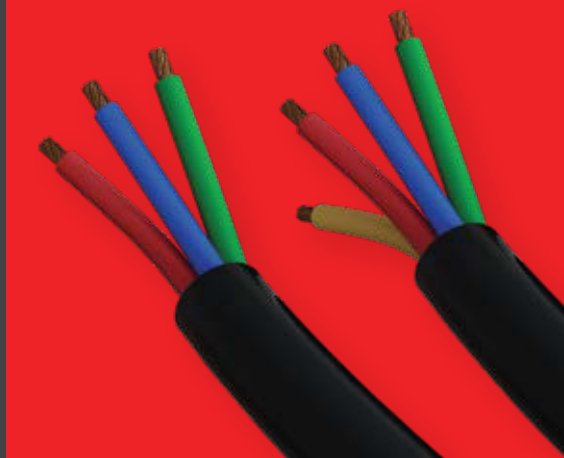



Colours :

Red Green Blue

YL W BL









TARASHA

PVC Tape

Size : 6m I 15m
Flammability : Self Extinguishing
Insulation Resistance : 10(5) Mega ohms (min)

NORTEK

Lighting Lives...

Scan to view our **E-PRODUCT CATALOGUE**

www.nortekled.com | info@nortekled.com | 022-40144321 | / nortek_lighting_lives

Scan to view our **EXPERIENCE CENTRE**

DYNAMIC LIGHTING SOLUTIONS LLP

Dynamic Lighting Solutions LLP

205, Udyog Mandir No 1, 7-C, Pitamber Lane,
Mahim West, Mumbai, Maharashtra-400016.